
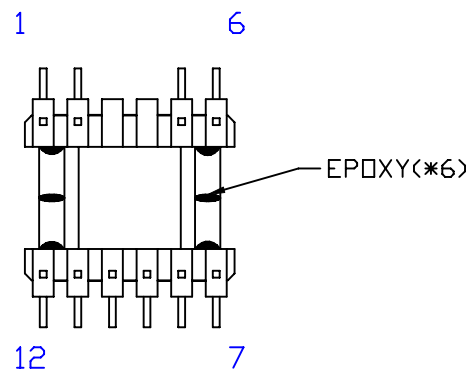

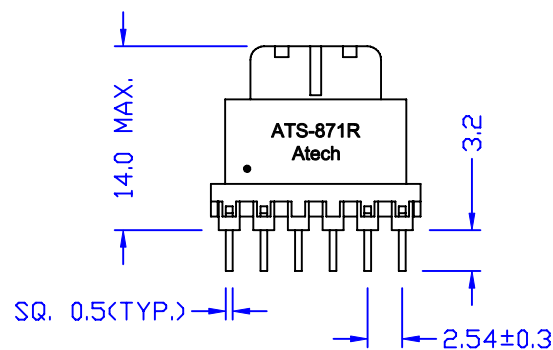
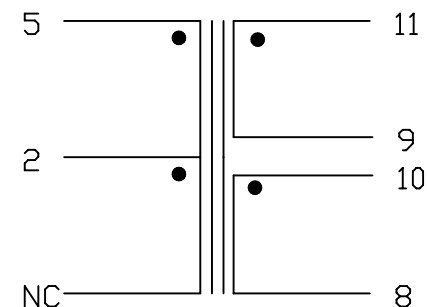



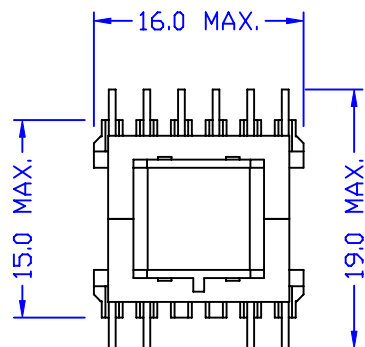

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.3

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 2-5 = 3.7 Ω MAX.
PIN 8-10 = 14 m Ω MAX.
PIN 9-11 = 56 m Ω MAX.
- INDUCTANCE (@10KHZ, 0.1V) :
PIN 2-5 = 1.4 mH $\pm 5\%$.
- TURN RATIO(@100KHZ,0.1Vrms)
PIN 5-2 : 10-8 = 25 $\pm 2\%$
PIN 5-2 : 11-9 = 11.11 $\pm 2\%$
- HI-POT : (@3KVAC, 1mA 2SEC.) PRI-SEC
- RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:0272794-6667 FAX:0272794-8004	TITLE TRANSFORMER	
							DWG. NO. ATS-871R	
	RELEASE	09/27/2007	PAIR	WILLIE	EUGENE	UNITS: M/M	SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	SHEET 1 OF 1
REVISIONS						09/27/07	CTW013004A	DRAW <i>Pair</i>