
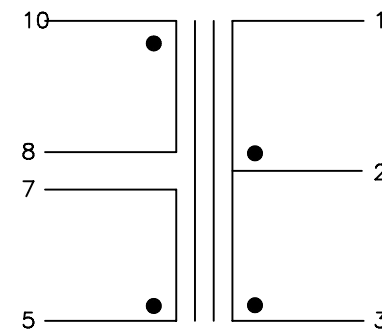
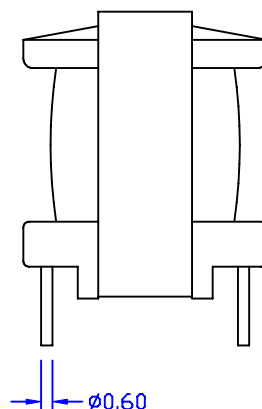
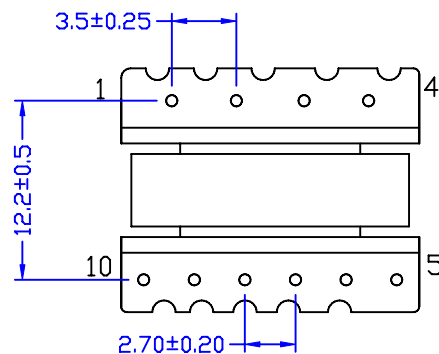
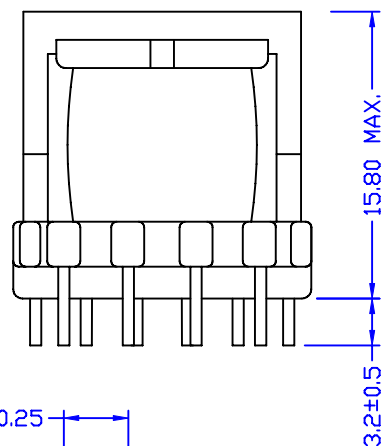


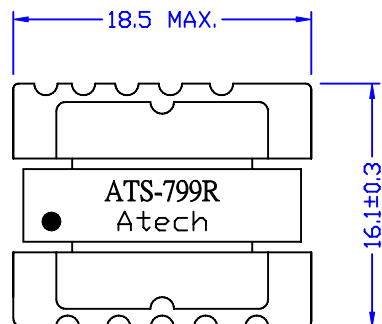

ELECTRICAL CHARACTERISTICS :

- D.C.R. : PIN 2-1 = 255 mΩ MAX.
PIN 3-2 = 60 mΩ MAX.
PIN 5-7 = 1.2 Ω MAX.
PIN 10-8 = 3.87 Ω MAX.
- INDUCTANCE (@10KHz, 0.1Vrms, ALC OFF) :
PIN 10-8 = 2.5mH±5%
- LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms,) :
PIN 10-8 (7-5,1-2-3 SHORT) = 108 uH MAX.
- INTERWINDING CAP (@100KHz, 0.1Vrms) :
PIN 1-5 = 20 pF MAX. PIN 1-10 = 15pF MAX.
- TURN RATIO (@200KHz, 0.1Vrms) :
PIN 10-8 : 2-1 = 11.09±3%
PIN 10-8 : 3-2 = 17.43 ±3%
PIN 10-8 : 5-7 = 4.52±3%
- HI-POT (@500VAC, 1mA, 2SEC) :
PRI-SEC .
- RoHS COMPLIANCE

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004	TITLE TRANSFORMER	
B	SPC.	10/02/2006	PAIR	VINCENT	EUGENE		DWG. NO. ATS-799R	
A	DIM 16.1 ±0.30	07/17/2006	PAIR	LYS	EUGENE	UNITS: M/M		SHEET 1 OF 1
	RELEASE	03/27/2006	PAIR	LYS	EUGENE	SAFETY		
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW
REVISIONS						03/27/06	CTW016004A	Pair