
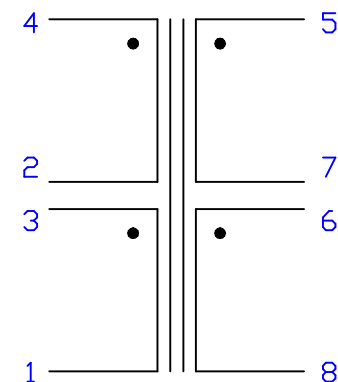


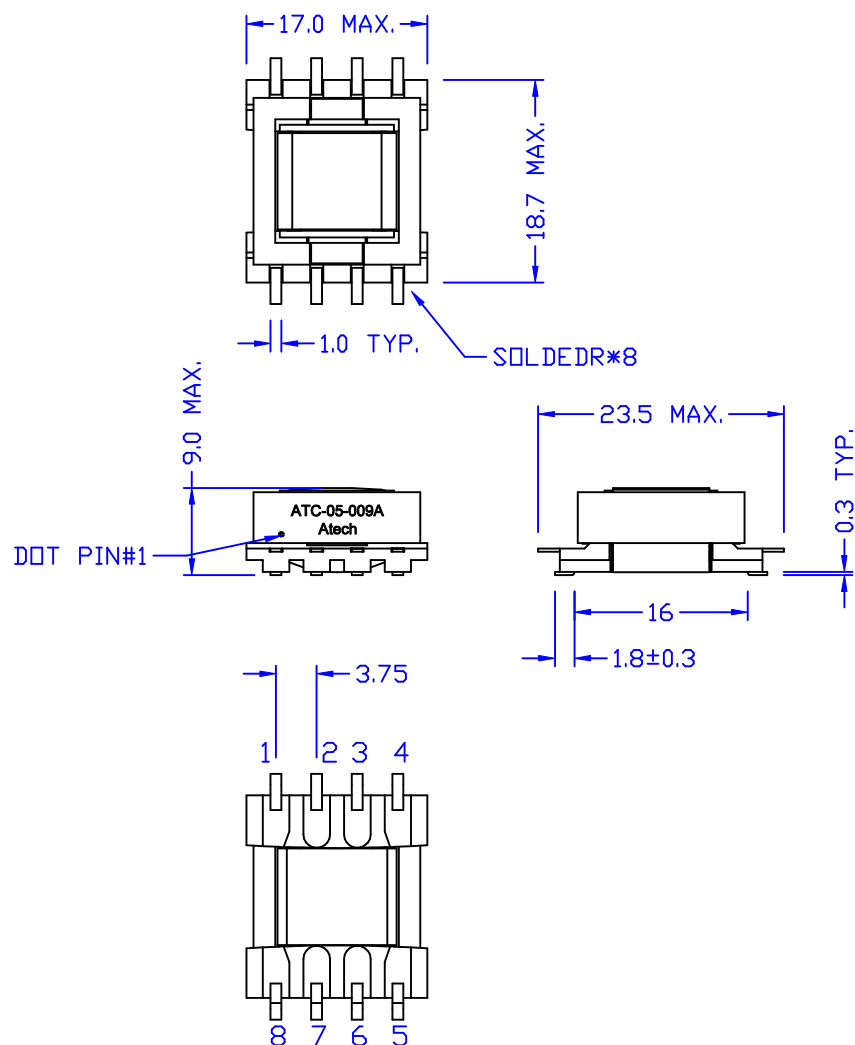

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 4-2 = 0.058 OHM MAX.
PIN 1-3 = 1.24 OHM MAX.
PIN 5-7 = 0.026 OHM MAX.
PIN 6-8 = 0.026 OHM MAX.
- INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 4-2 = 41 uH ±5%.
PIN 1-3 = 41 uH ±5%.
PIN 5-7 = 5.8 uH ±5%.
PIN 6-8 = 5.8 uH ±5%.
- TURN RAITO (10KHZ, 0.1Vrms) :
PIN 4-2:5-8 (6-7 SHROT) = 1.33 ±2%.
PIN 4-2:3-1 = 1 ±2%.
- HI-POT (@1500VAC, 1mA, 1MIN) :
PIN 4-5 (6-7 SHROT)
- RoHS COMPLIANCE

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ±0.25

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE TRANSFORMER	
								DWG. NO. ATC-05-009AR	
	RELEASE	02/13/2006	PAIR	MICHAEL	SUEDY	UNITS: M/M		SAFETY	SHEET 1OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 02/13/06			DRAW <i>Pair</i>
REVISIONS									