
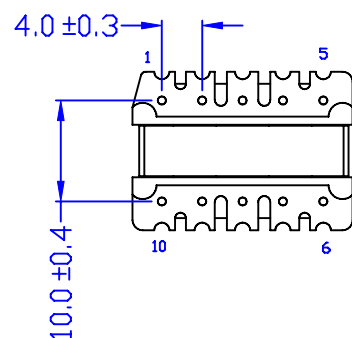

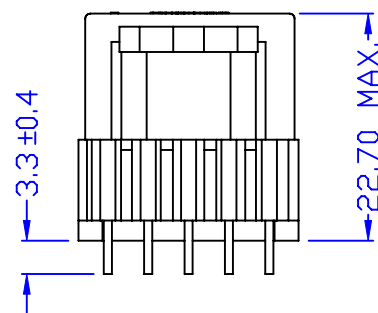
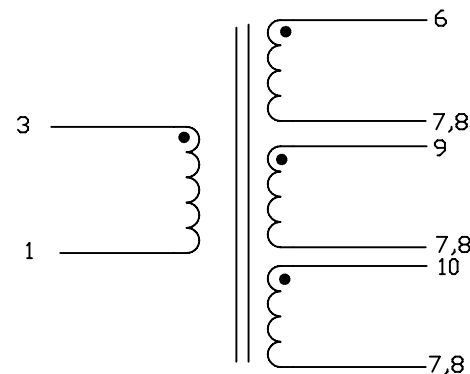
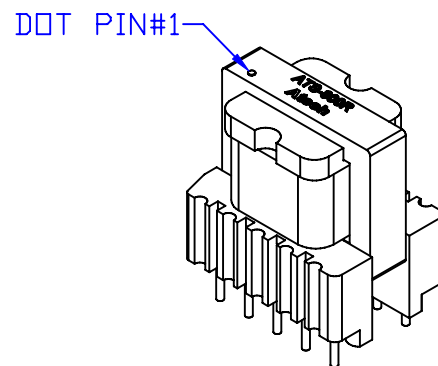




ELECTRICAL CHARACTERISTICS:

- D.C.R : PIN 3-1 = 1100 mΩHM MAX.
 6-7 = 11.5 mΩHM MAX.
 6-8 = 11.5 mΩHM MAX.
 9-7 = 53 mΩHM MAX.
 9-8 = 53 mΩHM MAX.
 10-7 = 246 mΩHM MAX.
 10-8 = 246 mΩHM MAX.
- INDUCTANCE(@30KHZ,0.1Vrms) : PIN 3-1 = 700uH±8%
- TURN RATIO(@300KHZ,0.1Vrms)
 PIN 3-1 : 6-7 = 29±2%
 3-1 : 6-8 = 29±2%
 3-1 : 9-7 = 14.5±2%
 3-1 : 9-8 = 14.5±2%
 3-1 : 10-7 = 8.7±2%
 3-1 : 10-8 = 8.7±2%
- HI-POT(@3.75KVAC,5mA,2SEC): PIN 3-6(7-8-9, SHORT)
- RoHS COMPLIANT

					Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004	TITLE TRANSFORMER		
B	16.8 MAX. & D.C.R	08/01/2007	PAIR	VINCENT		EUGENE	DWG. NO. ATS—800R	
A	D.C.R	06/25/2007	PAIR	VINCENT		EUGENE		
	RELEASE	05/03/2007	Pair	Vincent		Eugene	UNITS: M/M	SAFETY
NO.	DESCRIPTION	DATE	BY	CHK		APPD	DATE 05/03/07	P/N: CTW019004A
REVISIONS						SHEET 1 OF 1 DRAW <i>Pair</i>		