
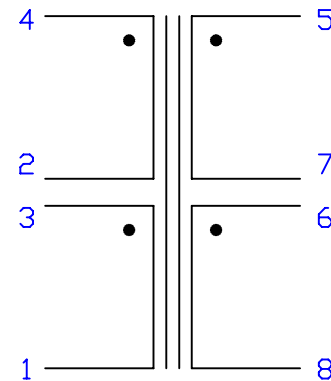
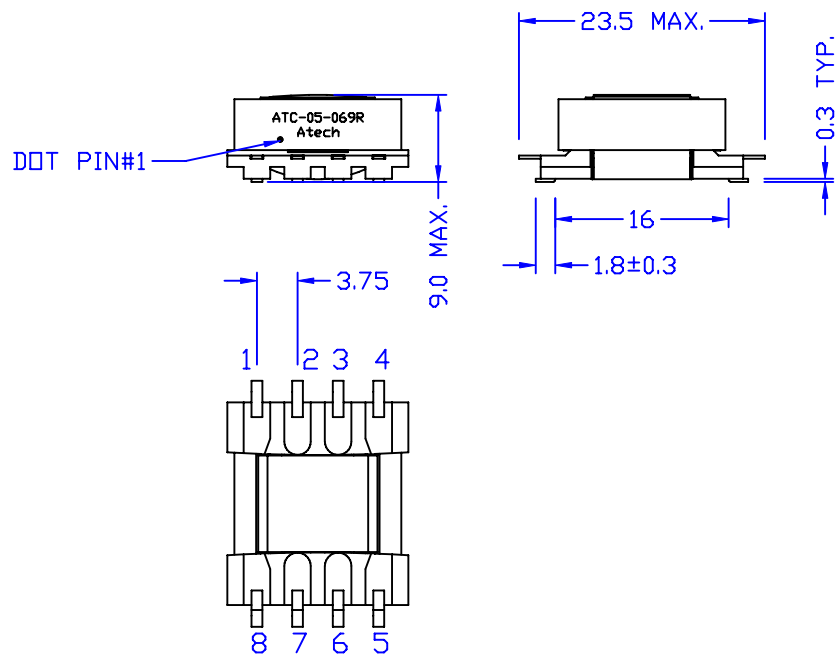


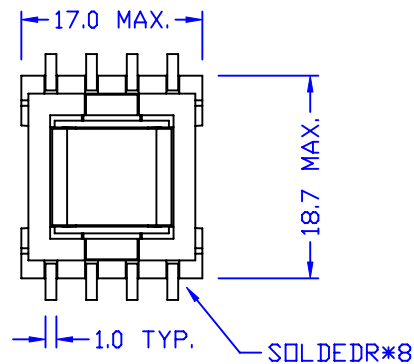

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 1.2 Ω HM MAX.
PIN 2-4 = 0.054 Ω HM MAX.
PIN 5-7 = 6-8 = 0.027 Ω HM MAX.
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 2-4 = 36 μ H $\pm$ 10%.
PIN 5-8 (6-7 SHORT) = 23 μ H $\pm$ 10%.
PIN 1-3 = 36 μ H $\pm$ 10%.
- TURN RATIO (@4KHZ, 0.1Vrms) :
PIN 4-2:5-8 (6-7 SHORT) = 1.25 $\pm$ 3%.
PIN 4-2:3-1 = 1 $\pm$ 3%.
- HI-POT (@1500VAC, 1mA, 1MIN) : PRI-SEC
- RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE $\pm$ 0.25

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE TRANSFORMER	
								DWG. NO. ATC-05-069R	
	RELEASE	04/20/2007	PAIR	MICHAEL	EUGENE	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N: CTW115003A		DRAW <i>Pair</i>
REVISIONS									