
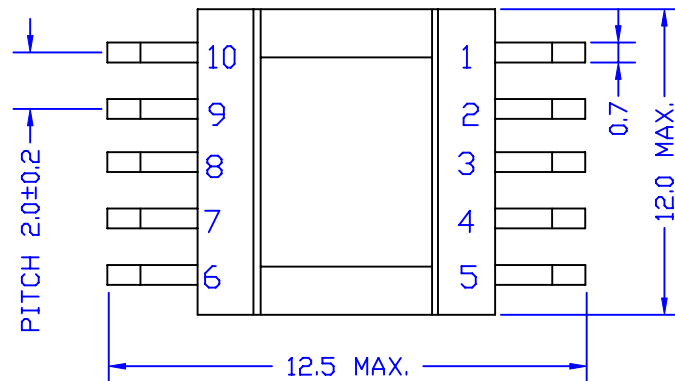



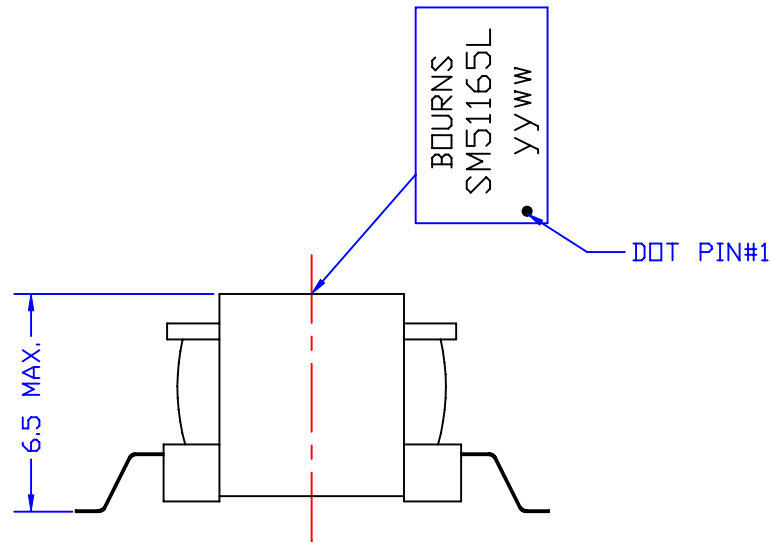

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-5 = 6.25 Ω HM MAX.
PIN 6-10 = 0.16 Ω HM MAX.
- INDUCTANCE (@0.1Vrms, 10KHz) :
PIN 1-5 = 855 μ H $\pm$ 10%.
PIN 6-10 = 12 μ H $\pm$ 10%.
- LEAKAGE INDUCTANCE (@0.1Vrms, 100 KHz) :
PIN 1-5 (6-10 SHORT) = 65 μ H MAX.
- INTERWINDING CAP (@0.1Vrms, 100KHz) :
PIN 1-10 = 7 pF MAX.
- TURN RATIO (@1Vrms, 50 KHz) :
PIN 1-5:6-10 = 8.36 $\pm$ 1%.
- HI-POT (@600VAC, 1mA, 2SEC) :
PIN 1-10
- RoHS COMPLIACNE.

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE TRANSFORMER	
A	PIN W 0.7	02/13/2007	PAIR	MICHAEL	EUGENE		DWG. NO. SM51165EL	
	RELEASE	11/15/2005	BART	LYS	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 11/15/05	P/N: CTW711008A	DRAW Pair
REVISIONS								