

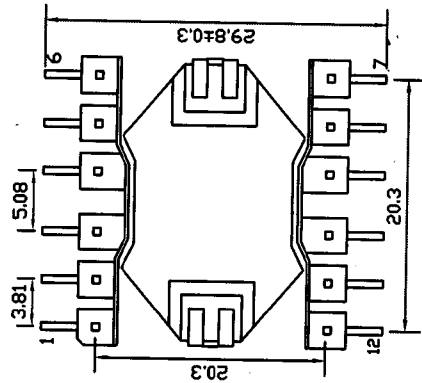


ATSE-033

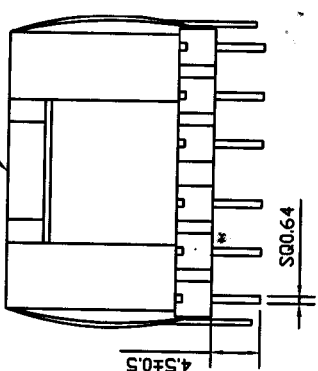

ELCETRICAL CHARACTERISTICS:

1. DCR

- PIN1-2=350mOHM+/-10%
- PIN3-4=17mOHM+/-10%
- PIN5-6=130mOHM+/-10%
- PIN7-8=9mOHM+/-10%
- PIN9-12=100mOHM+/-10%

2. INDUCTANCE (@1KHZ, 0.1V, ALC off)

- PIN1-2=195uH+/-5%

3. POLARITY

- PIN2. PIN4. PIN6. PIN8
- PIN12. PIN11. PIN10 INPHASE
- 4. HI-POT=1875VAC, 1mA, 2sec
- PRI-SEC

TITLE				Atech®				DWC. NO.				ATSE-033			
Atech Technology Co., Ltd.				TEL: (02) 788-1938 FAX: (02) 788-1960				MATERIAL				UNITS:			
NO				DESCRIPTION				DATE				BY			
CHK				APPD				SAFETY				SHEET OF			
DRAW				DATE				JOHN				DRAW			