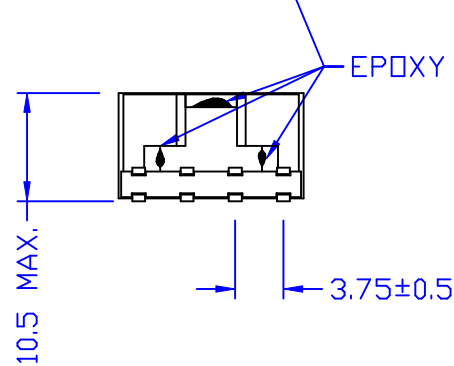


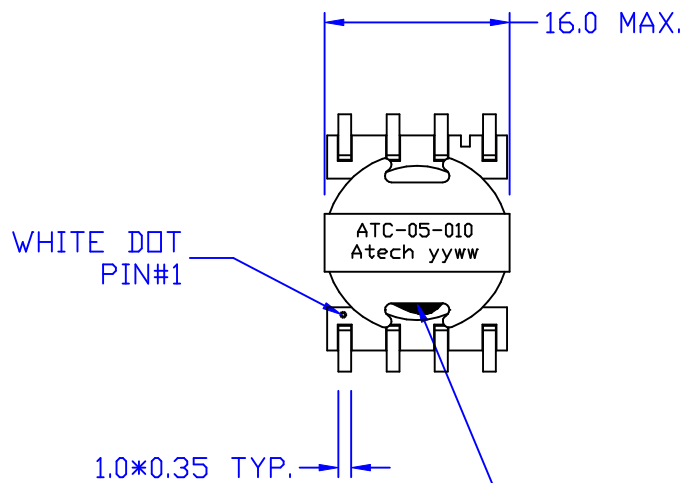


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 7-8 = 148 mΩ MAX.
PIN 3-2 = 6.0 mΩ REF.
- INDUCTANCE (@250KHZ, 1Vrms) :
PIN 7-8 = 100 μH ±5%.
PIN 3-2 = 3.5 μH REF.
- LEAKAGE INDUCTANCE (@250KHZ, 0.1Vrms) :
PIN 7-8 (2-3 SHORT) = 3.0 μH MAX.
- Q (@250KHZ, 0.1Vrms) :
PIN 7-8 = 110 REF.
PIN 3-2 = 65 REF.
- TRUN RATIO (@250KHZ, 0.1Vrms) :
PIN 7-8:3-2 = 5.33 ±1%.
- HI-POT (@500VAC, 60HZ, 5mA) :
PRI-SEC, PRI-CORE, SEC-CORE

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE TRANSFORMER	
								DWG. NO. ATC-05-010	
A	SPEC.	12/16 /2005	BART	SEAN	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
	RELEASE	03/02 /2005	BART	EEFLYS	SUEDY	DATE			DRAW
NO.	DESCRIPTION	DATE	BY	CHK	APPD	03/02/05			Pair
REVISIONS									