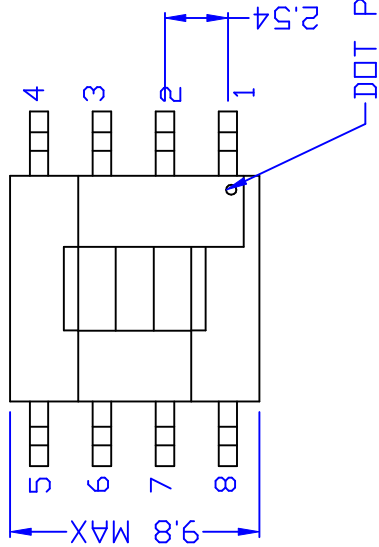


1. D.C.R : 3-5 = 0.055 Ω M MAX, 5-4 = 0.06 Ω M MAX.
1-8 = 0.4 Ω M MAX, 8-2 = 0.44 Ω M MAX.
2-7 = 0.48 Ω M MAX.
2. L : @100KHZ,100mV) 3-4 = 3.02uH+/-10%
3. LEAKAGE INDUCTANCE : (@140KHZ, 100mV)3-4 = 0.3uH MAX,(1,2,7,8 SHORT)
4. TURN RATIO(@100KHZ, 100mV) 1-8 : 2-7 = 1.07+/-7%
1-8 : 8-2 = 1.07+/-7%
1-8 : 3-5 = 2.8+/-7%
1-8 : 5-4 = 2.8+/-7%
5. HI-POT(@500 VAC, 1mA Ss)1-4
6. RoHS COMPLIANT

[illegible]