
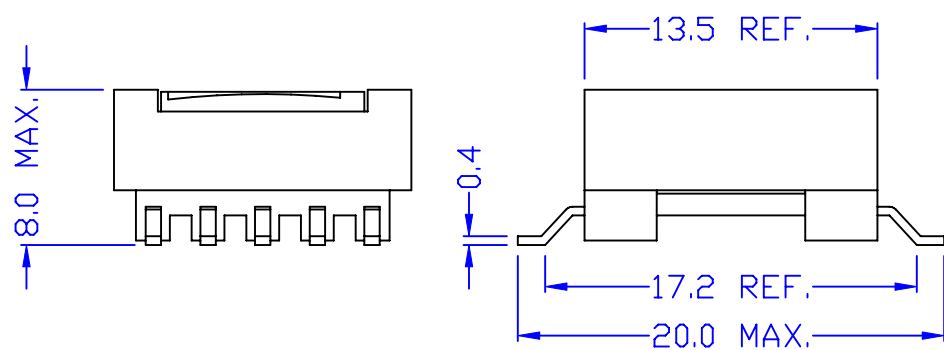

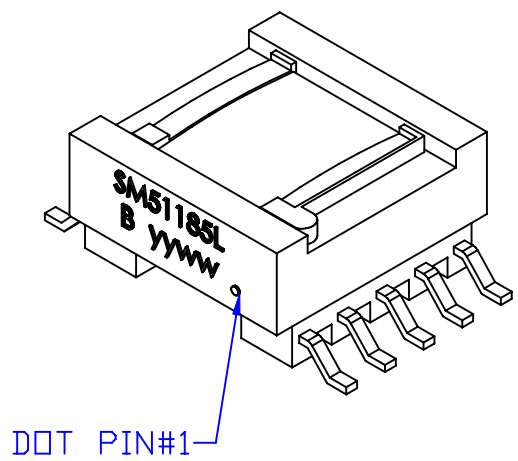


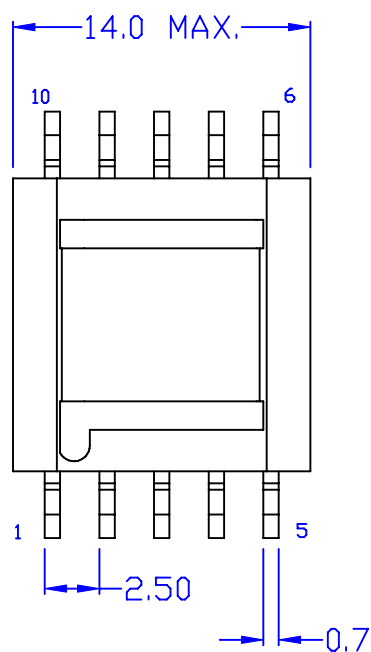

ELECTRICAL CHARATERISTICS :

- DCR: 1-10 = 600 mΩHM MAX. 3-8 = 1400mΩHM MAX.
5-6 = 13 mΩHM MAX. 7-4 = 12 mΩHM MAX.
9-2 = 450 mΩHM MAX.
- INDUCTANCE (@100KHZ,1Vrms) : 1-10 = 9-2 = 215uH MIN.
5-6 = 7-4 = 5.38uH MIN.
3-8 = 588uH MIN.
- TURN RATIO(@800KHZ, 1Vrms) 3-8 : 1-10 = 1.7 ±2%
3-8 : 5-6 = 10.25±2%
3-8 : 9-2 = 1.7±2%
5-6 : 7-4 = 1±2%
- HI-POT(@500VAC,5mA,3S) = 5-1 , 7-1 , 5-3 , 7-3 , 5-9 , 7-9
- RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE TRANSFORMER
							DWG. NO. SM51185L
A	CHANGE MARKING	05/23 2007	PAIR	VINCEN	EUGENE		
	RELEASE	10/30 /2006	PAIR	VINCEN	EUGENE	UNITS: M/M	SAFETY
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE 10/30/06	SHEET 1 OF 1
REVISIONS						P/N: CTX513001A	DRAW <i>Pair</i>