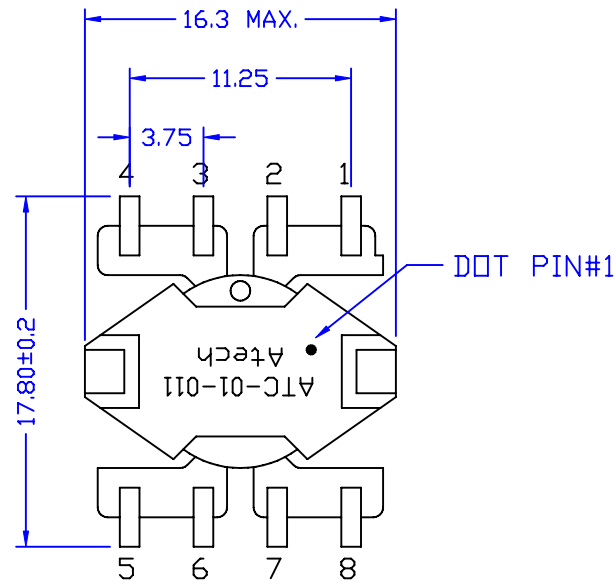


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-2 = 210 $\pm$ 12%.
PIN 5-7 = 210 $\pm$ 12%.
PIN 6-8 = 210 $\pm$ 12%.
- INDUCTANCE (@1KHz, 0.1Vrms) :
PIN 1-2 = 31 μ H $\pm$ 5%.
PIN 5-7 = 31 μ H $\pm$ 5%.
PIN 6-8 = 31 μ H $\pm$ 5%.
- TURN RATIO (@50KHz, 0.1Vrms) :
PIN 2-1:7-5 = 1 $\pm$ 2%.
PIN 2-1:8-6 = 1 $\pm$ 2%.
PIN 7-5:8-6 = 1 $\pm$ 2%.
- HI-POT (@500VAC, 1mA, 2SEC) :
PIN 2-7-8
- RoHS COMPLIANCE.

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE	TRANSFORMER
B	CHANGE TEST FUNCTION	12/26/2006	PAIR		EUGENE		DWG. NO.	ATC-01-011R
A	D.C.R & TURN RATIO	10/05/2006	PAIR		EUGENE			
	RELEASE	09/15/2005	BART	LYS	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	M/M		
						DATE	P/N:	DRAW
REVISIONS						09/15/05	CTX805009A	<i>Pair</i>