
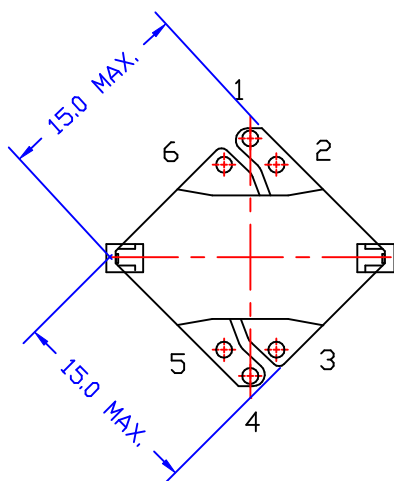
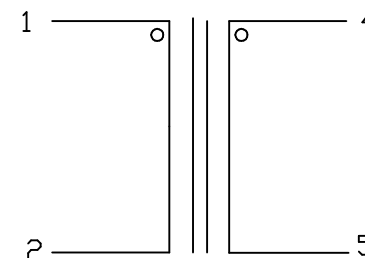
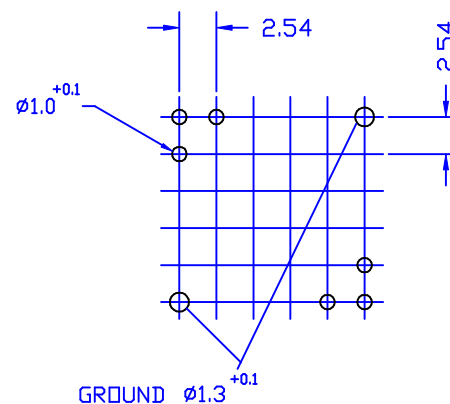


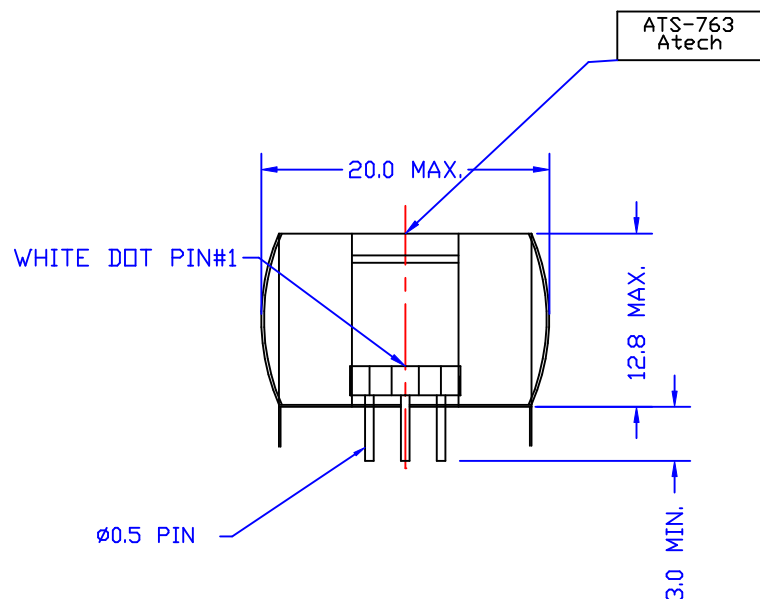

ELECTRICAL CHARACTERISTICS:

- DCR : PIN 1-2 = 60 Ω HM MAX.
PIN 4-5 = 75 Ω HM MAX.
- INDUCTANCE (@1KHz, 0.1Vrms) :
PIN 1-2 = 2.2 H MIN.
- IMPEDANCE (@1KHz, 0.1Vrms, PIN 4-5 W/H 475 Ω HM) :
PIN 1-2 = 600 Ω HM $\pm 20\%$.
- INTERWINDING CAP. (@1KHz, 0.1Vrms) :
PIN 1-4 = 25 pF MAX.
- TURN RATIO (@1KHz, 0.1Vrms) :
PIN 1-2:4-5 = 1 $\pm 2\%$.
- HI-POT (@1500VAC, 1mA, 2S) :
PRI-SEC.
- RoHS COMPLIANCE.

						Atech [®] Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE 600: 475 TRANSFORMER	
							DWG. NO. ATS-763R	
	RELEASE	01/13/2006	BART		SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						01/13/06		