
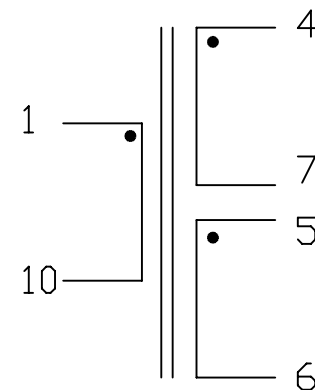
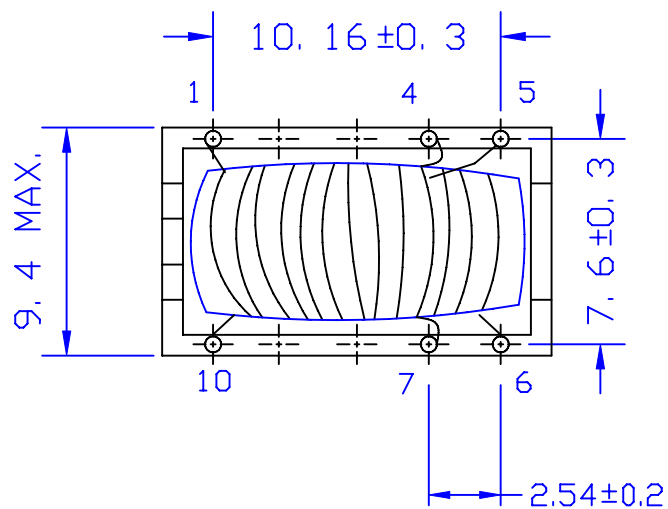


ATS-812R
• Atech

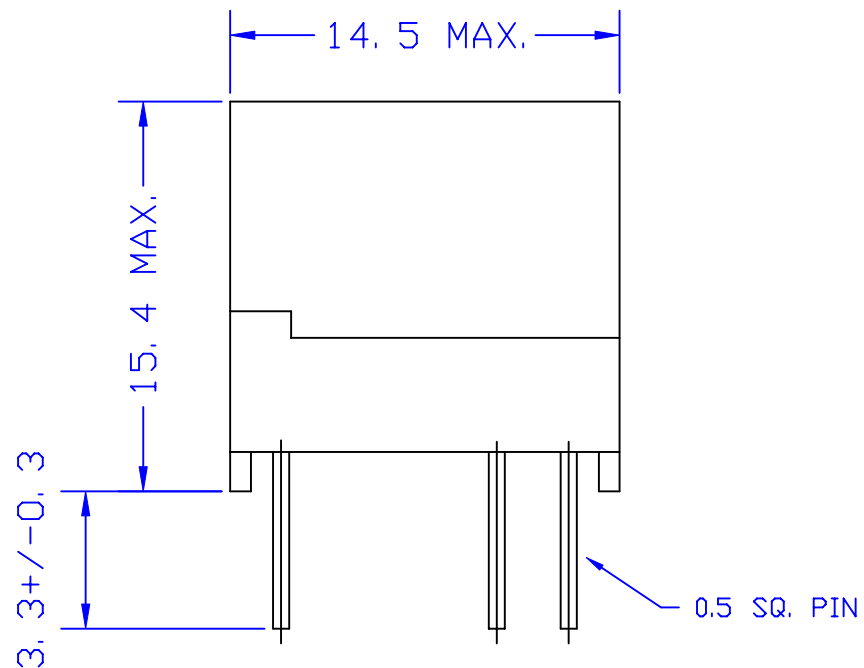

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-10 = 21 mOHM MAX.
PIN 4-7 = 21 mOHM MAX.
PIN 5-6 = 10 mOHM MAX.
- INDUCTANCE (@100KHZ, 0.1Vrms, ALC OFF) :
PIN 1-10 = 38 uH $\pm$ 30 %.
PIN 4-7 = 38 uH $\pm$ 30 %.
PIN 5-6 = 7 uH $\pm$ 30 %.
- TURN RATIO (@800KHZ, 0.1Vrms) :
PIN 1-10:4-7 = 1 $\pm$ 2%.
PIN 1-10:5-6 = 2.33 $\pm$ 2%.
- HI-POT (@500VAC, 1mA, 2S) :
PIN 1-5, 1-4
- RoHS COMPLIANT

						Atech® Atech Technology Co. Ltd. TEL:02)2794-6667 FAX:02)2794-8004	TITLE TRANSFORMER	
a	3.3+/-0.3 CHANGE	L	06/30/2006	pair	eugene		DWG. NO. ATS-812R	
RELEASE			05/26/2006	PAIR	MICHAEL EUGENE	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO	DESCRIPTION		DATE	BY	CHK	APPD		DRAW Pair
REVISIONS						05/26/06		