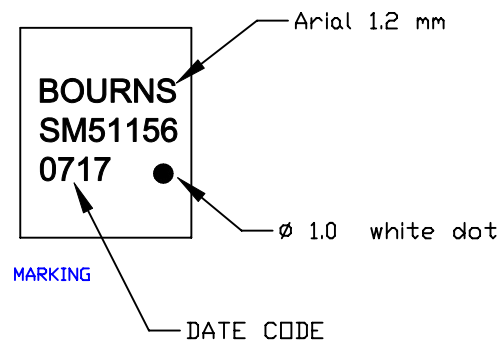
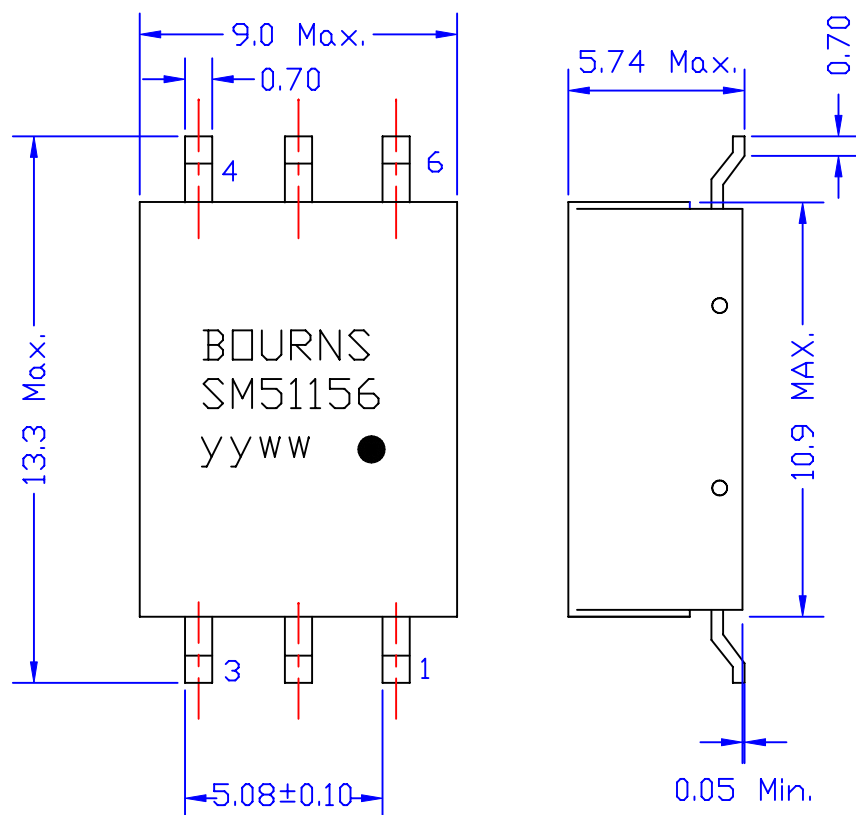


ELECTRICAL CHARACTERISTICS:

1. D.C.R. : 1-5 = 0.2 OHM MAX. 2-6 = 0.2 OHM MAX.
3-4 = 20 OHM MAX.
2. INDUCTANCE(@1KHZ,0.1Vrms,PARALLEL) : 4-3 = 315mH MIN.
3. DISTRIBUTED CAP.(@1MHZ,0.1Vrms) : 4-3 = 43pF MAX.
4. INSULATION RESISTANCE(@500VDC,500M OHM MIN.) :
PRI- SEC.
5. TURN RATIO(@100KHZ,0.1Vrms) 4-3 : 1-5 = 80±1.25%
4-3 : 2-6 = 80±1.25%
6. HI-POT(@500VAC,0.5mA,1SEC): PRI-SEC , PRI - CORE
SEC-CORE

						Atech [®]		TITLE
B	PARALLEL	05/07/2007	PAIR	WILLIE	EUGENE	Atech Technology Co., Ltd.		TRANSFORMER
A	CHANGE MARKING	04/16/2007	PAIR	WILLIE	EUGENE	TEL:(02)2794-6667 FAX:(02)2794-8004		DWG. NO.
	RELEASE	12/26/2006	PAIR		SUEDY	UNITS:	SAFETY	SM51156E
NO.	DESCRIPTION	DATE	BY	CHK	APPD	M/M	P/N:	SHEET 1 OF 1
REVISIONS						DATE	CTXL08000A	DRAW
						12/26/06		Pair