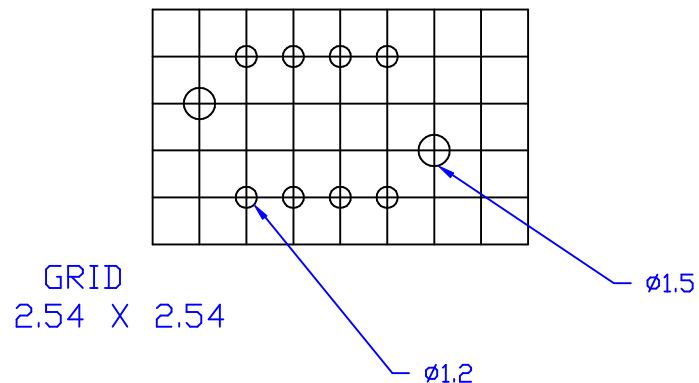
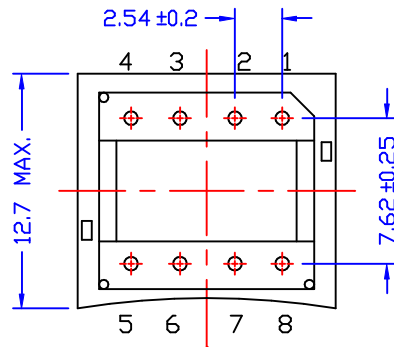
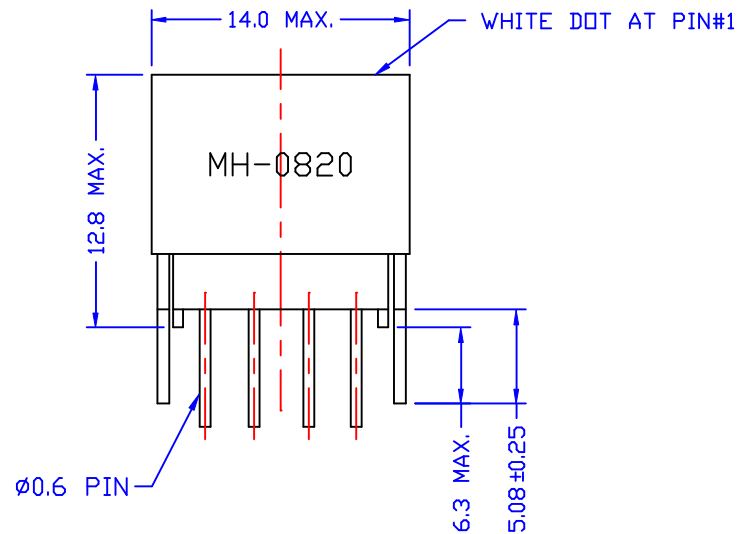


ELECTRICAL CHARACTERISTICS :

(FOR MITEL MT89790B E1 INTERFACE)

1. D.C.R. : PIN 4-8 = 0.55 OHM MAX, PIN 4-7 = 0.4 MAX.
PIN 1-5 = 2-6 = 0.85 OHM MAX.
2. INDUCTANCE (@1KHZ, 0.1Vrms) : PIN 4-8 = 0.43mH MIN.
PIN 4-7 = 0.24mH MIN.
3. TURN RATIO (@650KHZ, 1Vrms) PIN 2-6 : 1-5 = 1±1%
PIN 4-7 : 1-5 = 1±1%
PIN 4-8 : 1-5 = 1.33±1%
6. HI-POT : (@1500VAC, 1mA, 1MIN.)
PIN 4-1, 4-2, 1-CORE, 2-CORE, 4-CORE

						Atech®		TITLE CEPT OUTPUT TRANSFORMER	
						Atech Technology Co. Ltd.		DWG. NO. MH-0820A	
						TEL:022794-6667 FAX:022794-8004			
A	ADD PIN4-7=0.4MAX. HI-POT 1MIN.	08/26/2003	PAIR	KEVIN	SUEDY	UNITS: M/M		SAFETY	
	RELEASE	06/25/2003	RORY	KEVIN	SUEDY			SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW	
REVISIONS						06/25/03		Pair	