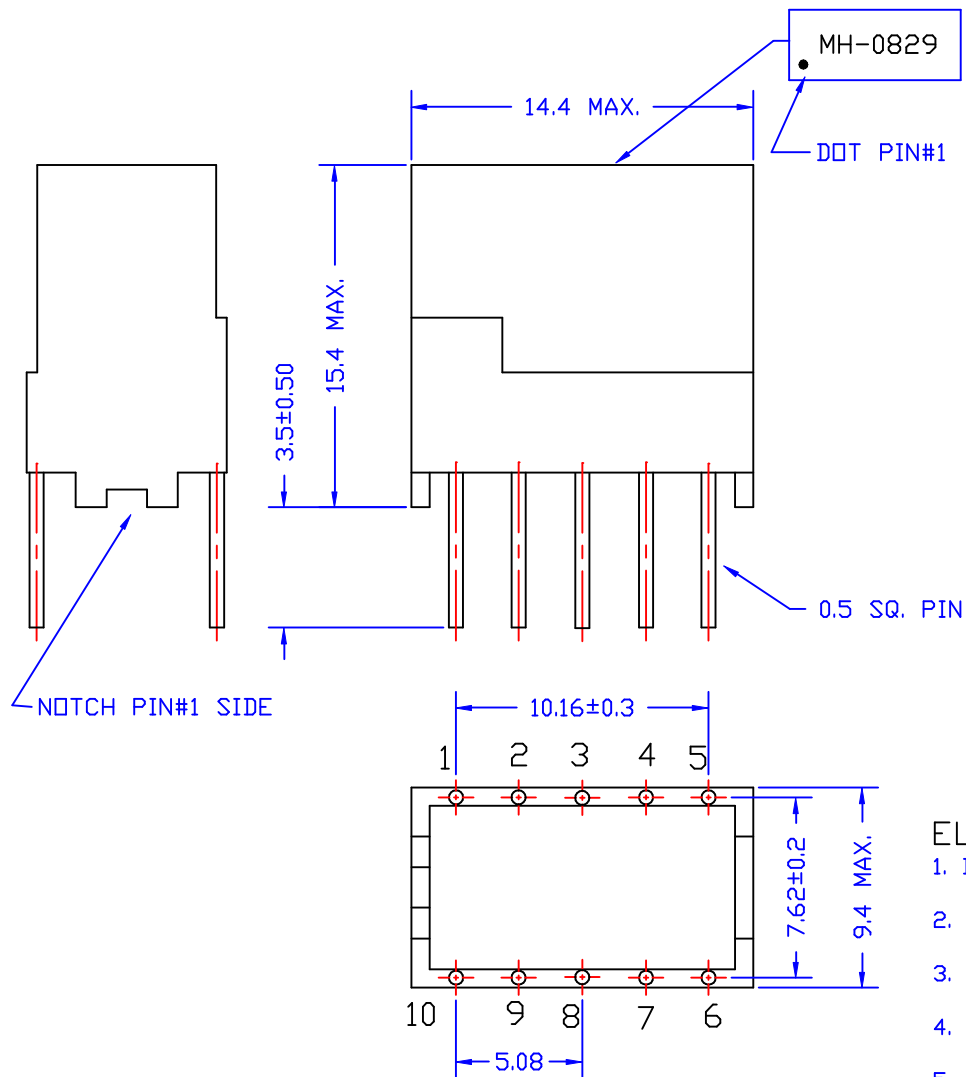


ELECTRICAL CHARACTERISTICS : (T60403-L4025-X027 COMPATIBLE)

- DCR. : 1-10 = 2-9 = 4-7 = 5-6 = 0.168 OHM MAX.
3-8 = 0.112 OHM MAX.
- INDUCTANCE (@10KHZ, 0.1Vrms, 1-9&2-8 SHORT)
3-10 = 5mH MIN.
- LEAKAGE (@100KHZ, 0.1Vrms, 1-9&2-8&4-6&5-7 SHORT)
3-10 = 1uH MAX.
- TURNS RATIO (@50KHZ, 1Vrms)
1-10 : 2-9 : 3-8 : 4-7 : 5-6 = 1.5 : 1.5 : 1 : 1.5 : 1.5
- HI-POT (@2KVAC, 2SEC) BETWEEN EACH WINDINGS

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE ISND-S2M TRANSFORMER	
								DWG. NO. MH-0829	
	RELEASE	10/16/03	PAIR		SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						10/16/03			