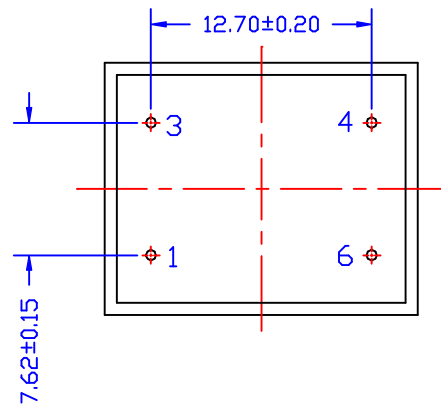
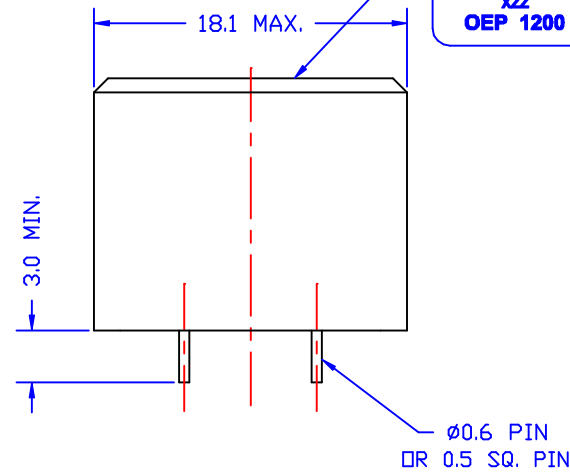
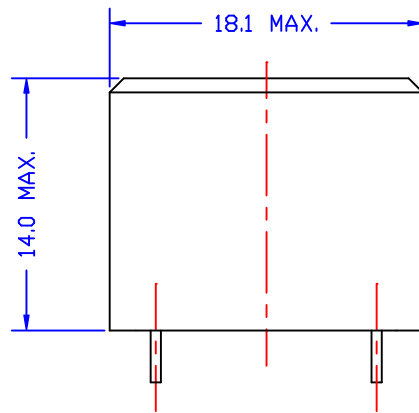


ELECTRICAL CHARACTERISTICS: (COMPATIBLE WITH P1200 FOR V.32bis)

1. D.C.R. : PIN 1-3 = 65 OHM+/-5% PIN 6-4 = 65 OHM+/-5%
2. INDUCTANCE(@200HZ,10mVrms, PARALLEL): PIN 1-3 = 4.15H MIN.
3. LEAKAGE INDUCTANCE(@200HZ, 10mVrms, SERIES) : PIN 1-3 = 20mH MAX.
4. RETURN LOSS : (REF. 600 OHM)300 TO 4KHZ = 23dB MIN.
5. INSERTION LOSS :(@1KHZ,1Vrms) 1.3dB MAX.
6. FREQ. RESPONSE: (REF. 1KHZ) 300 TO 4KHZ = +/-0.2dB
7. LONGITUDINAL BALANCE : 200HZ-4KHZ = 80dB MIN.
8. TURN RATIO : (@6KHZ, 0.1Vrms) PIN 1-3 : 6-4 = 1+/-1%
9. DISTORTION : 300HZ, 0dbm : -77dB MAX.
10. HI-POT : (4000 VAC, 1mA, 1MIN.)PIN1-6
11. CORE LOSS : (@1KHZ, 1Vrms) = 13K OHM

D	CAN	11/06/03	BART	AL	SUEDY	Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE	TRANSFORMER
C	MARKING	09/03/2003	PAIR	AL	SUEDY		DWG. NO.	OEP1200D
B	INDUCTANCE	04/28/2003	RORY		SUEDY			
	RELEASE	03/12/99	PAIR		SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
NO	DESCRIPTION	DATE	BY	CHK	APPD	M/M		DRAW
REVISIONS						DATE		Pair
						03/12/99		