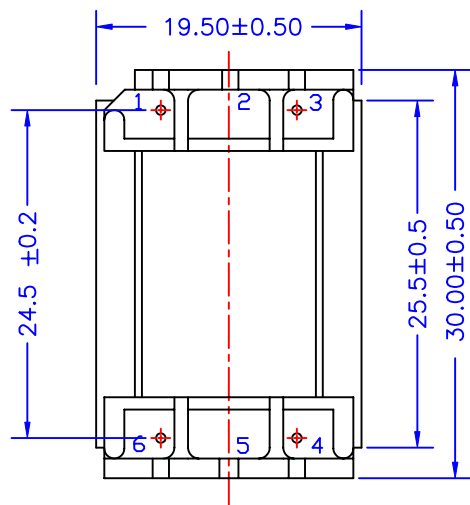
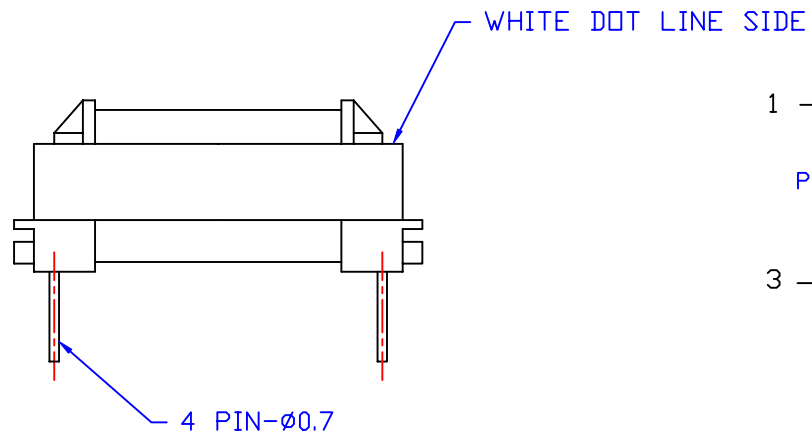
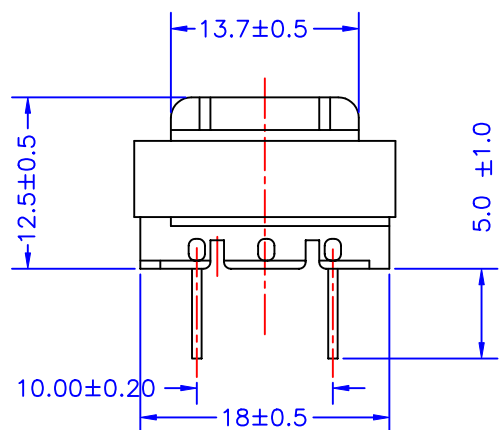


ELECTRICAL CHARACTERISTICS :

1. IMPEDANCE RATIO : PRI. : 600 OHMS SEC. : 600 OHMS
VARIATION : ±10% @ 1KHZ, 80mAdc IN PRI.
2. D.C.RESISTANCE : PRI. : 147 OHMS ±15% SEC. : 104 OHMS ±15% @25°C
3. INSERTION LOSS : 2.7DB MAX. 300HZ TO 3.5KHZ @80mAdc
4. RETURNS LOSS : 11 DB MIN. FROM 300HZ TO 3.5KHZ @80mAdc.
5. HI-POT TEST : 3750 Vac MIN. 60Hz 1mA FOR 1MINUTE PRI. TO SEC.
6. INSULATION RESISTANCE : 100 MEGOHMS MIN. @500 Vdc

						Atech® Atech Technology Co., Ltd. TEL:02/2794-6667 FAX:02/2794-8004	TITLE TRANSFORMER	
							DWG. NO. TA12-003	
	RELEASE						UNITS: M/M	SAFETY
NO.	DESCRIPTION	DATE	BY	CHK	APPD		DATE	SHEET 1 OF 1
REVISIONS							DRAW <i>Pair</i>	