
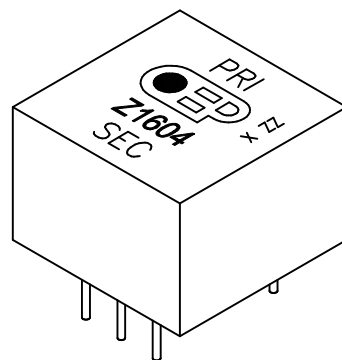
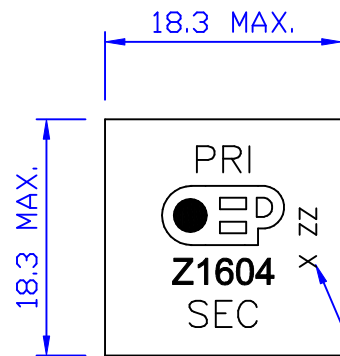
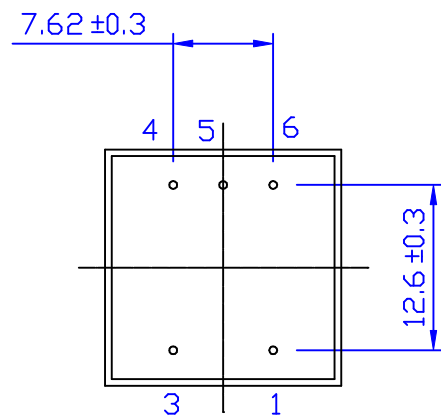


DATA CODE

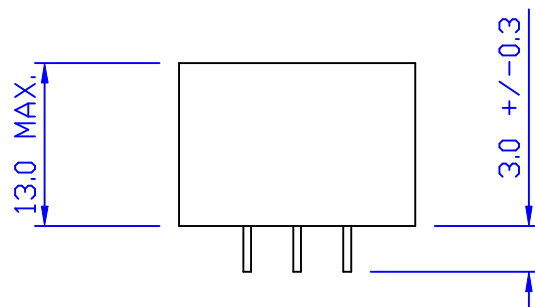

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 108.9 Ω HM $\pm 15\%$,
PIN 6-5 = 64.4 Ω HM $\pm 15\%$,
PIN 5-4 = 69.6 Ω HM $\pm 15\%$.
- INDUCTANCE (@100HZ, 0.27Vrms) :
PIN 1-3 = 7.14 H MIN.,
PIN 6-5 = 1.79 H MIN.,
PIN 5-4 = 1.79 H MIN.,
PIN 6-4 = 7.14 H MIN.
- TURN RATIO (@100HZ, 0.27Vrms) :
PIN 1-3:6-4 = $1 \pm 1\%$,
PIN 1-3:6-5 = $2 \pm 1\%$.
- HI-POT (@2KVAC, 0.5mA, 2S) : PRI-SEC.

						Atech®		TITLE TRANSFORMER	
B	PIN 3.0+/-0.3	03/06 /2006	PAIR	AL	EUGENE	Atech Technology Co., Ltd.		DWG. NO.	Z1604
A	REDRAW	09/15 /2004	BART	MICHAEL	SUEDY	TEL:022794-6667 FAX:022794-8004			
	RELEASE	02/08 /2002	DOLLY	CPLIU	SUEDY	UNITS:	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	M/M			DRAW
REVISIONS						DATE	02/08/02		Pair