



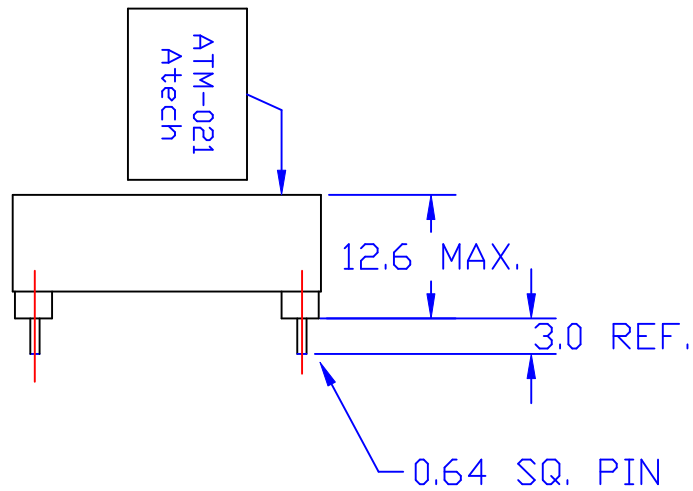

Symbol	FUNCTION
+24Vin	+24Vdc Supply Input
+5Vin	+5Vdc Supply Input
INH	ON/OFF Control Input (Internal Pull Low)
F0 , F1	Frequency Selection Input (Internal Pull High)
OHD	Off-Hook/Overload Detection Output
SYNC	Zero Crossing Induction Output
OAC	Output Amplitude Control
GND	Ground
O1 , O2	Output

Output Amplitude	LOAD
86 Vrms	4 REN
75 Vrms	5 REN
60 vrms	8 REN
40 Vrms	12 REN

Frequency	F1	F0
50 HZ	"0" or tied to GND	"0" or tied to GND
16.7 HZ	"0" or tied to GND	"1" or not connected
25 HZ	"1" or not connected	"0" or tied to GND
20 HZ	"1" or not connected	"1" or not connected

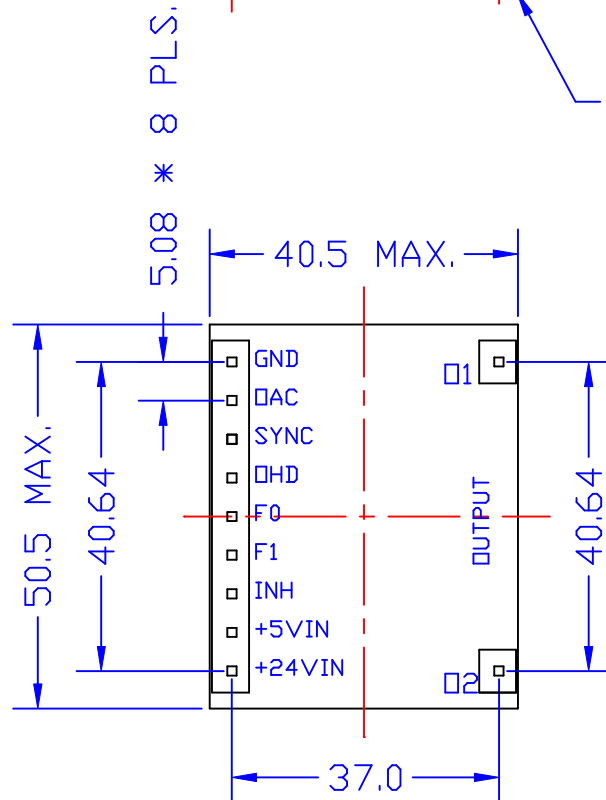

BOTTOM VIEW

TOL. : .X ±0.3
.XX ±0.15

						Atech®		TITLE 24V, 5W RINGER MODULE	
						Atech Technology Co., Ltd.		DWG. NO. ATM-021	
						TELE: (02)2794-6667 FAX: (02)2794-8004			
RELEASE		08/14/00	PAIR		SUEDY	UNITS: M/M		SAFETY	
NO: DESCRIPTION		DATE	BY	CHK	APPD	DATE		SHEET 1 OF 2	
REVISIONS						08/14/00		DRAW Pair	