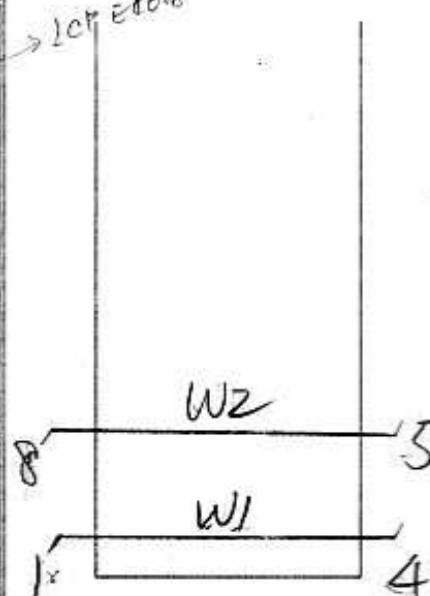
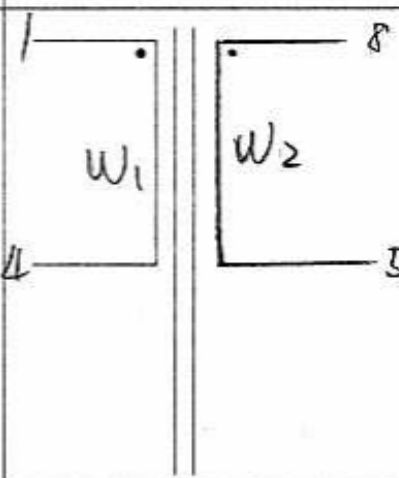
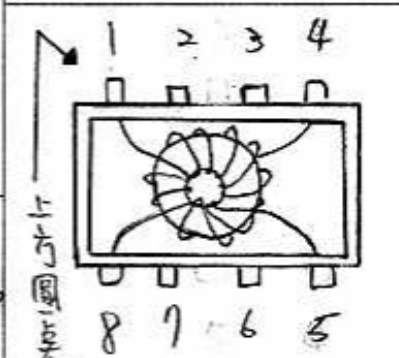


CUSTOMER		PART NUMBER		REV	CONSTRUCTION							SCHEMATIC DRAWING	
ASKEY		ATR-068		B	1008 								
BOBBIN: CAN: CN-S1010-002				BOTTOM VIEW PIN LOCATION									
CORE: TR-004/02-03													
GAP:													
TAPE:													
ASSEMBLY:													
FRAME(CLIP):													
PIN#1 INDICATOR: 上方圖美													
TAP WID mm	TAP LYR	WID	STR	END	CW/ CCW	WIR SIZ	COA	TUR	CRE PAG	DEN LSN	SIDE WALL	REMARKS	
		W1	1	4	順	AUG 38	0.38 0.15	9 1/2		均		1. W1 繞線內圈 10TS, 外圈 9TS.	
		W2	8	5	:	0.15	2.0	19 1/2		=		2. W2 繞線內圈 20TS, 外圈 19TS.	
		W3										3. 裝膠時, 底部以磁鐵固定 Core, 防止 Core 浮高.	
		W4										4. 須確認 core 完全置於 ANH, 而讓接腳可平貼於一平面.	
		W5										5. 成品須灌膠將 core 固定 (GLD).	
		W6										6. 繞線要平整, 成品限高 2.3mm MAX.	
		W7										PAGE / OF / REV. D	