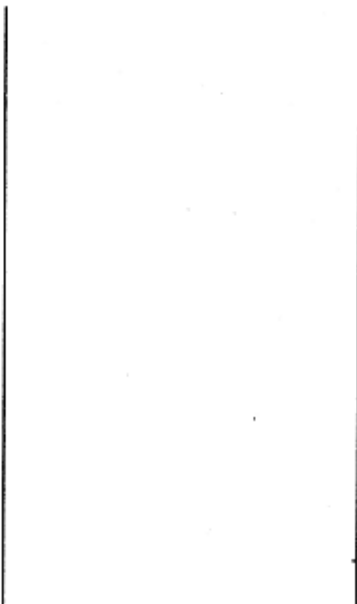
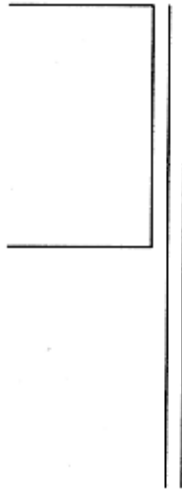



CUSTOMER		PART NUMBER		REV		CONSTRUCTION								SCHEMATIC DRAWING			
凱碩		A1S-74S															
BOBBIN: BB-EP13-13																BOTTOM VIEW PIN LOCATION	
CORE: FC-EP13-79																	
GAP:																	
TAPE: 3M #74, SUPER #10 PPI #70/100																	
ASSEMBLY: CORE 組合時, 有 GAP 的在 PIN 1 側, 外包 PPI #70/100, 7.7mm 2Ts.																	
FRAME (CLIP) 結尾處刷少許 VAR-DOS																	
PIN#1 INDICATOR: DOT																	
TAP WID Mm	TAP LYR	WID	STR	END	CW/CCW	WIR SIZ	COA	TUR	CRE PAG	DEN LSN	SIDE WALL						
雙	線	W1	5	7	反	0.08	206W 本	33	3M SUPER #10	密繞拉							
		W2	6	8	反	0.08	206W 紅	33	1.6mm 2Ts 在兩邊	直角							
雙	線	W3	1	3	反	0.1	206W 本	15		密繞拉							
		W4	2	4	反	0.1	206W 紅	15		直角							
3M #74 7.7mm	2	W5	16	11	順	0.075	206W 本	66	3M SUPER #10	密繞拉							
雙	線	W6	14	9	順	0.075	206W 紅	66	1.6mm 2Ts 在兩邊	直角							
		雙	線	W7	5	7	反	0.08	206W 本	33	3M SUPER #10	密繞拉					
雙	線			W8	6	8	反	0.08	206W 紅	33	1.6mm 2Ts 在兩邊	直角					
														REMARKS 1. 繞 W1, W2, W3, W4, W7, W8, W9, W10 時, BOBBIN PIN 1 朝外. 2. 繞 W5, W6, W11, W12 時, BOBBIN PIN 1 朝內. 3. 繞線時, 須注意平整度. 4. W3, W9 起繞 PIN #1 纏腳 須走 BOBBIN 外線溝. 5. 成品須夾 6 夾 GL-014 放平烤乾.			
												PAGE 1 OF 2 Design Engineer: <i>Juanf</i>		REV. A			

CUSTOMER		PART NUMBER		REV		CONSTRUCTION										SCHEMATIC DRAWING	
凱碩		ATS-745															
BOBBIN:																	
CORE:																	
GAP:																	
TAPE:																	
ASSEMBLY:				BOTTOM VIEW PIN LOCATION													
FRAME(CLIP):																	
PIN#1 INDICATOR:																	
TAP WID Mm	TAP LYR	WID	STR			END	CW/ CCW	WIR SIZ	COA	TUR	CRE PAG	DEN LSN	SIDE WALL				
双	线	W9	1			3	反	0.1	2UW 本	15	/	密繞 拉 直角					
		W10	2			4	反	0.1	2UW 紅	15							
3M#74 7.9mm	2	W11	16	11	順	0.075	2UW 本	66	3M SUPER #10	密繞 拉							
双	线	W12	14	9	順	0.075	2UW 紅	66	1.6mm 2Ts 在兩邊	直角							
		W5															
		W6															
		W7															
		W8															
PAGE 2 OF 2 Design Engineer:  REV. A																	