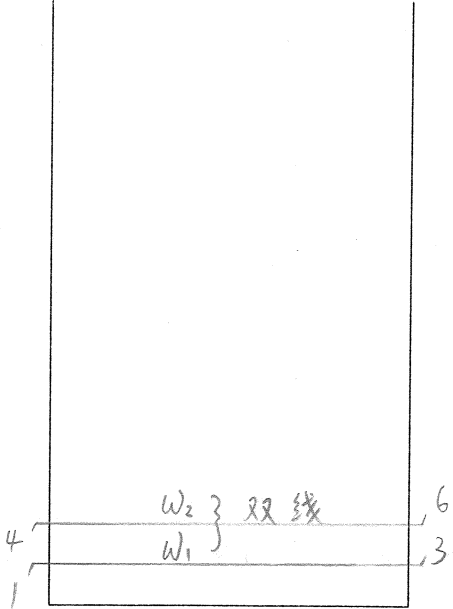
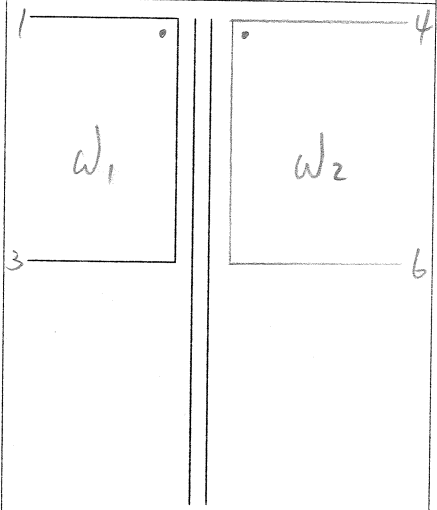
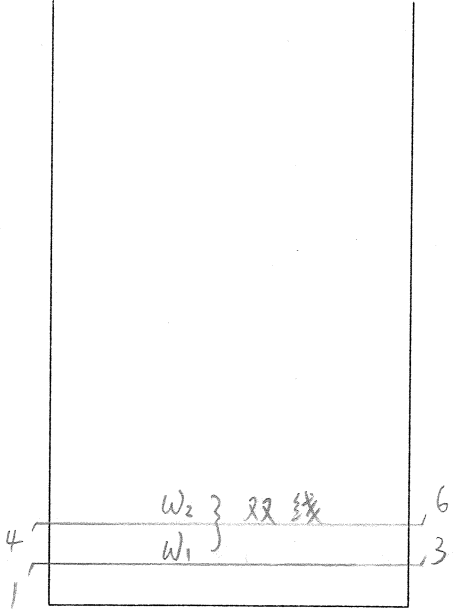
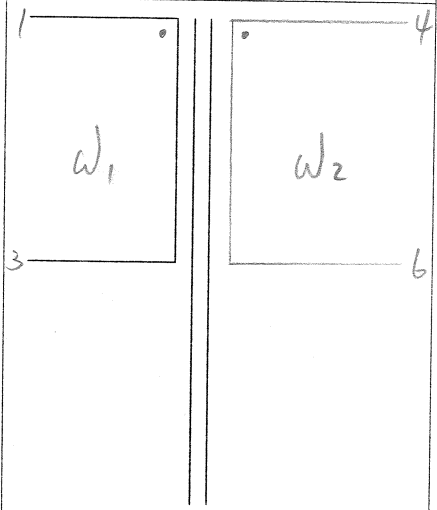
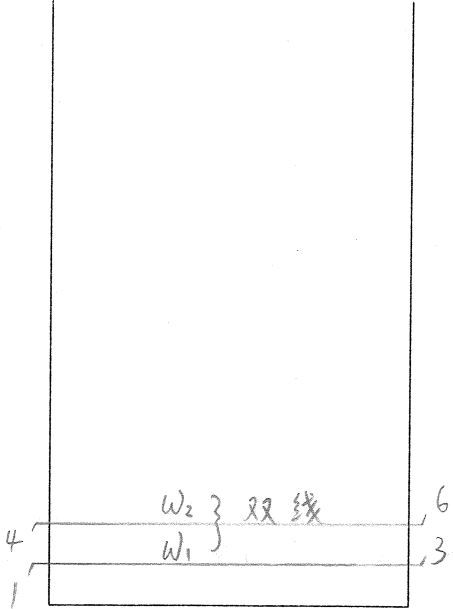
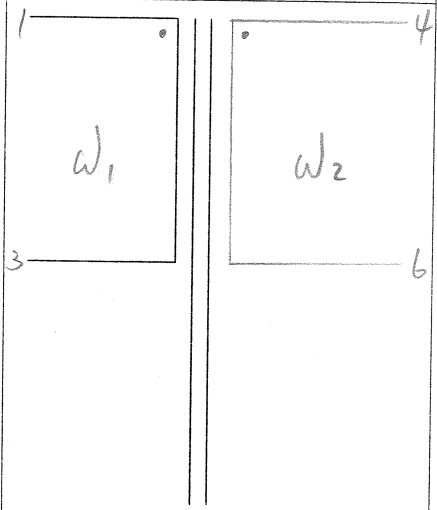
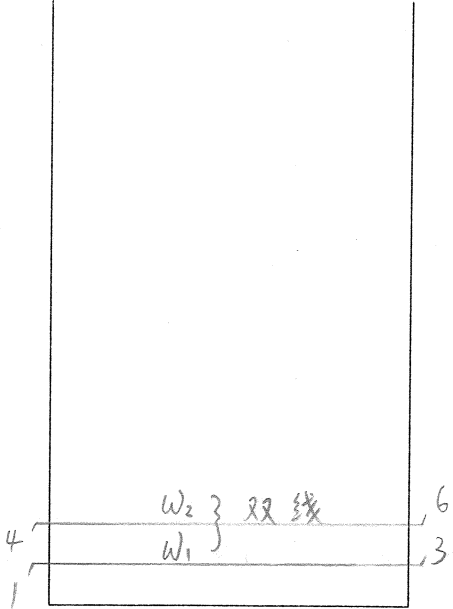
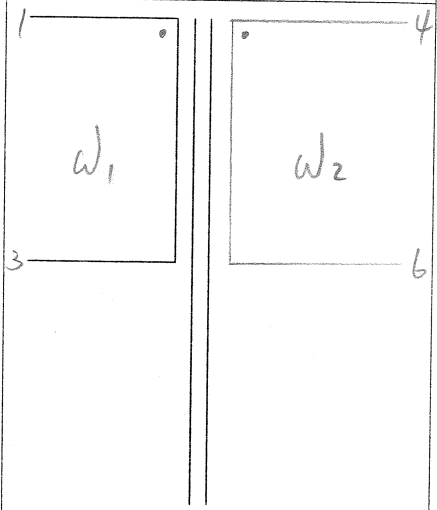
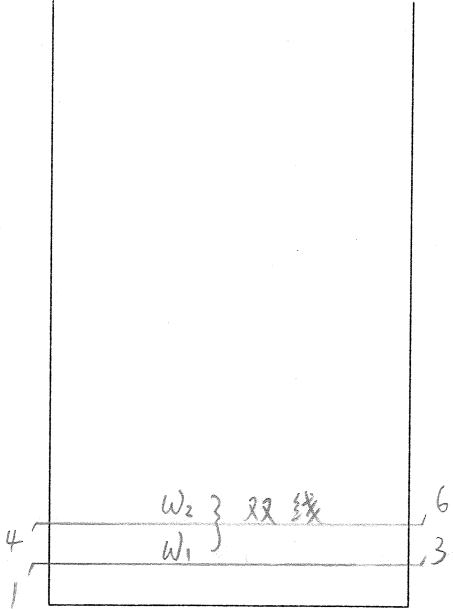
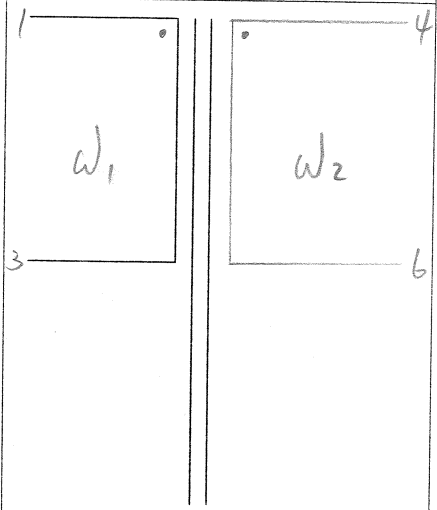
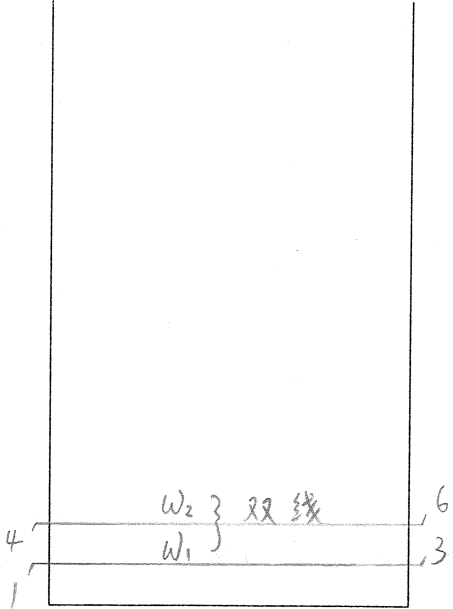
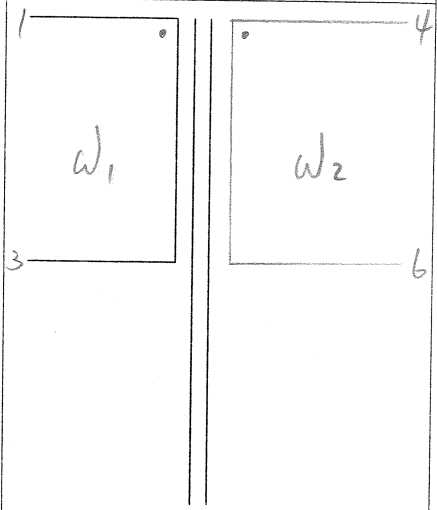
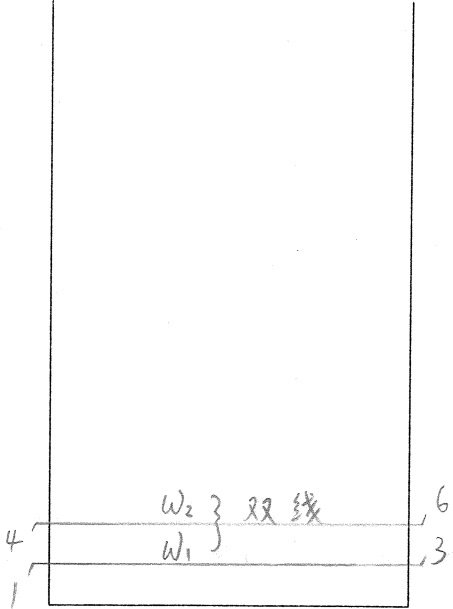
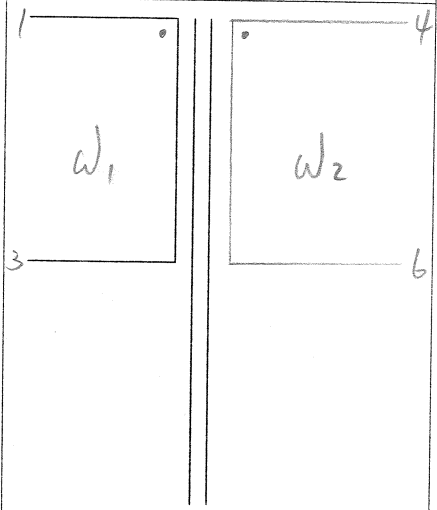
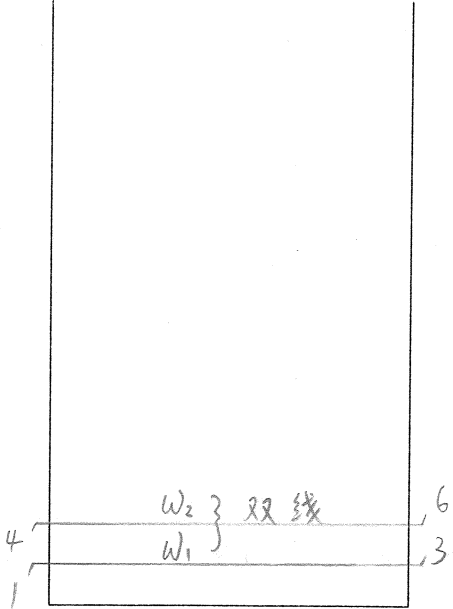
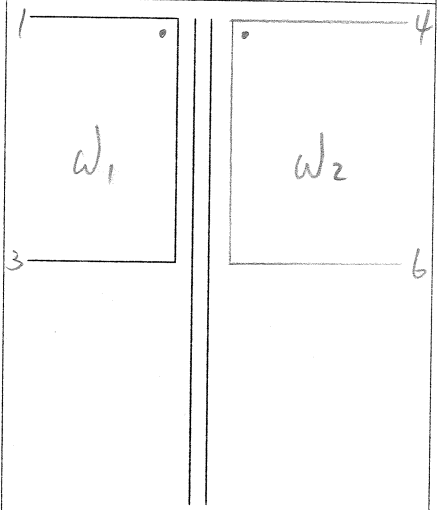
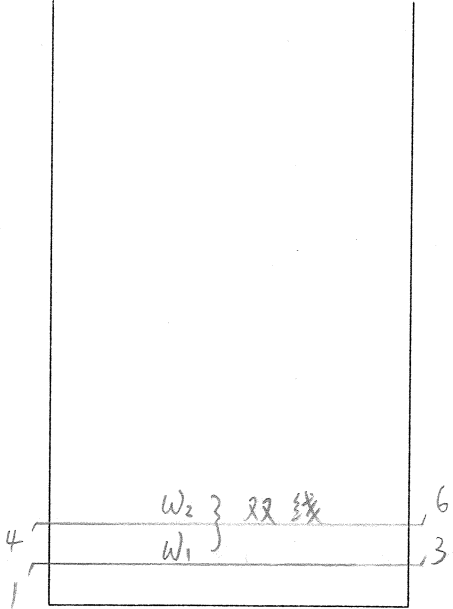
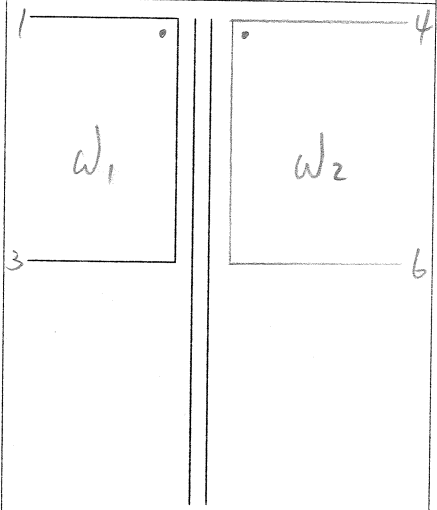
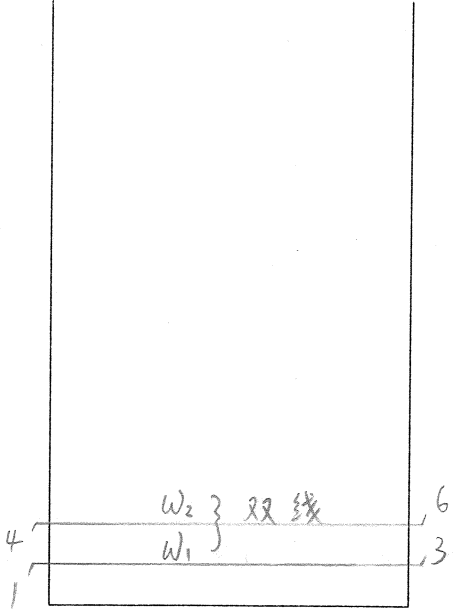
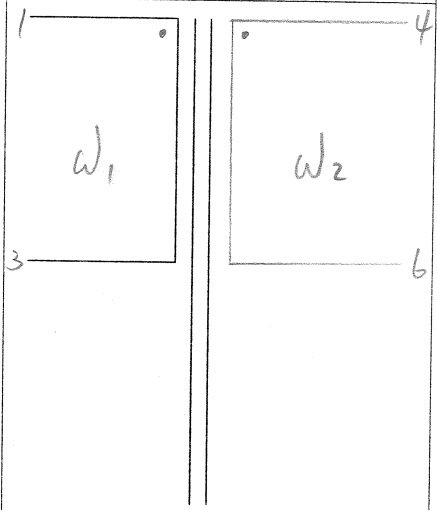


CUSTOMER		PART NUMBER		REV		CONSTRUCTION						SCHEMATIC DRAWING			
保得		ATS-616A													
BOBBIN: BB-EE0502-03															
CORE: FC-EE0502-07															
GAP:															
TAPE:															
ASSEMBLY: CORE 組合時, 有 GAP 的在 PIN #1 側, 外加 FRAME.															
FRAME(CLIP): FM-EE0502-01															
PIN#1 INDICATOR: 黑臭印在 LABEL 上															
TAP WID Mm	TAP LYR	WID	STR	END	CW/CCW	WIR SIZ	COA	TUR	CRE PAG	DEN LSN	SIDE WALL				
双	线	W1	1	3	顺	0.08	2 UEW 本	95	X	密	X				
		W2	4	6	顺	0.08	2 UEW 红	95	X	密	X				
		W3													
		W4													
		W5													
		W6													
		W7													
		W8													
REMARKS															
1. 繞 W1, W2 時, BOBBIN PIN #1 朝外, 2. W2 起繞時, 先將 PIN #4 暫繞於 PIN #3 (線頭須預留約 15mm), 待繞完後再將線繞回 PIN #4. 3. 繞線時須注意平整度. 4. 成品臭 2 排 GL-014 改正烤乾.															
PAGE OF												REV.			
Design Engineer: Lys												A			