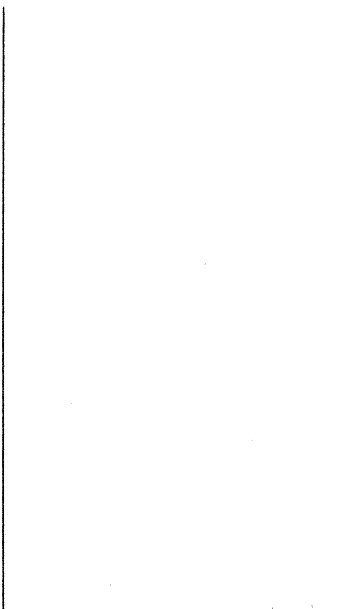
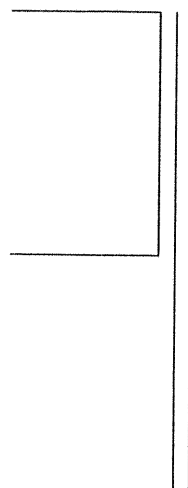


CUSTOMER		PART NUMBER	REV	CONSTRUCTION								SCHEMATIC DRAWING		
CARINDA		CTP028006A ATS-007AR												
BOBBIN:												BOTTOM VIEW PIN LOCATION		
CORE:														
GAP:														
TAPE:														
ASSEMBLY: CORE 組合後, 外包 3.5mm TAPE 2T,														
FRAME(CLIP): CAN: CN-S1414-01														
PIN#1 INDICATOR:														
TAP WID Mm	TAP LYR	WID	STR	END	CW/ CCW	WIR SIZ	COA	TUR	CRE PAG	DEN LSN	SIDE WALL	REMARKS		
		W1												
		W2												
		W3												
		W4												
		W5												
		W6												
		W7												
		W8												
1. 繞線工法同 671-8240 測試規格同 ATS-007A 2. 成品加 CAN 灌膠, 3. 注意包 CORE 的 TAPE 是 3.5mm, 否則灌膠會太高 (TAPE 不可高過 CORE) 4. 全部皆用 ROHS 材料 及製程.												PAGE Design Engineer	OF	REV.
												Lys		