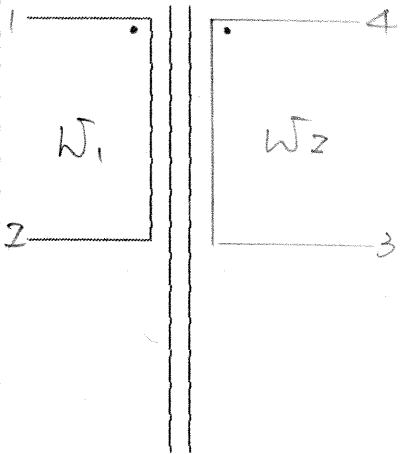
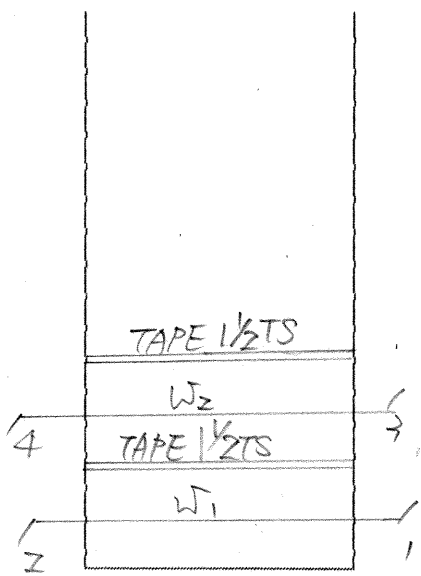
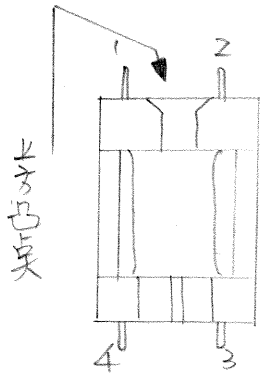


CUSTOMER			PART NUMBER			REV	CONSTRUCTION					SCHEMATIC DRAWING	
CIS			CTP30802RA										
			ATS-334										
BOBBIN: BB-EL0802-13												BOTTOM VIEW PIN LOCATION	
CORE: LM-EL08-05													
GAP: X													
TAPE: PPI#7010													
ASSEMBLY: 1*1共9片組合後,在 PIN#1端插入MX-024,再刷膠固定													
FRAME (CLIP): INSULATOR: MX-024													
PIN#1 INDICATOR: 黑桌印在LABEL上													
TAP WID mm	TAP LYR	WID	STR	END	CW/ CCW	WIR SIZ	COA	TUR	CRE PAG	DEN LSN	SIDE WALL		
10.5	1 1/2	W1	2	1	順	0.05	P180 G/F	1100		空			
10.2	1 1/2	W2	4	3	順	0.05	P180 G/F	1100		=			
		W3											
		W4											
		W5											
		W6											
		W7											
REMARKS													
1. 繞W1時, BOBBIN PIN#1 朝外 繞W2時, BOBBIN反插, PIN#1朝內 2. 插片時, 將(腰部或補線 溝)那一面放桌面, 第片鏢 片自BOBBIN PIN#3, #4那一 面插入。 3. 內層TAPE 1 1/2 TS, 重疊在 下方外層TAPE 1 1/2 TS, 重疊在 上方, 貼外層TAPE前貼 LABEL													
PAGE / OF /												REV. B	

REMARK 4: 繞線要平整, 否則會胖。
REMARK 5: LABEL要打桌, 貼在腰部。