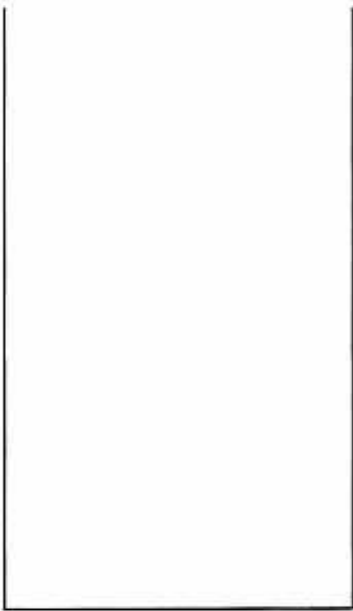
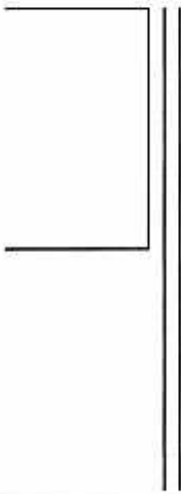


CUSTOMER			PART NUMBER		REV		CONSTRUCTION						SCHEMATIC DRAWING	
			TW-4149B											
BOBBIN:														
CORE:														
GAP:														
TAPE:														
ASSEMBLY:														
FRAME(CLIP):														
PIN#1 INDICATOR:									BOTTOM VIEW PIN LOCATION					
TAP WID Mm	TAP LYR	WID	STR	END	CW/ CCW	WIR SIZ	COA	TUR	CRE PAG	DEN LSN	SIDE WALL	REMARKS		
		W1												
		W2												
		W3												
		W4												
		W5												
		W6												
		W7												
		W8												
1. 所有CORE繞線方法同 TW-4149A. 2. CORE繞線完成後, 依 BASE腳位纏好焊錫後, 用VAR-005含浸至整個繞包(不可沾到PIN腳), 含浸乾後, 再於繞包上裹上KGL-018, 放一11片10mils NoMEX於繞包上, 並將熱縮套管套於成品外圍, 上方加黃漆。 3. NoMEX熱縮管同 TW-4149A												PAGE 1 OF 1		REV. A