
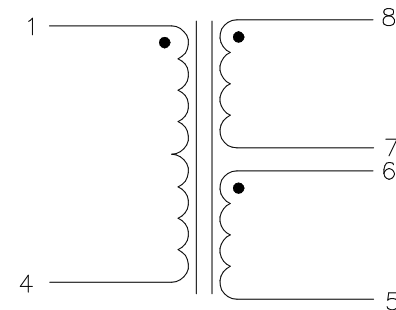


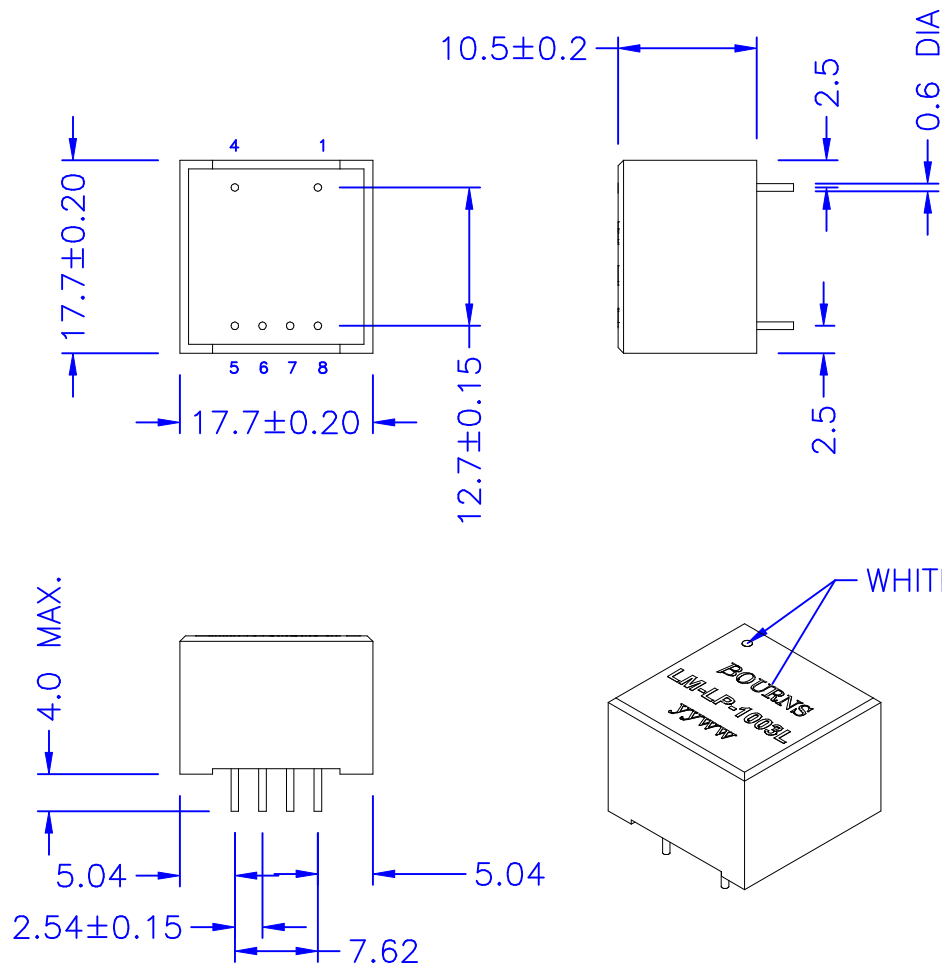

600 : 600SP

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 = 90 OHM $\pm$ 10%
PIN 5-8 (6-7 SHORT) = 90 OHM $\pm$ 10%
- PARALLEL INDUCTANCE : (@200HZ, 1Vrms) PIN 1-4 = 5-8 (6-7 SHORT) = 2.8H MIN.
- IMPEDANCE : (@1KHZ, 1Vrms, W/H 600 OHM LOAD) = 600 OHM $\pm$ 22%
- INSERTION LOSS : (@2KHZ, 1Vrms, W/H 600 OHM LOAD) = 2dB MAX.
- FREQ. RESP. : (REF. 1KHZ) @200HZ = -0.5dB MAX.
@4KHZ = -0.5dB MAX.
@10KHZ = -4.5dB MAX.
- RETURN LOSS : (REF. 600 OHM) @200HZ = 18dB MIN.
@1KHZ = 18dB MIN.
@4KHZ = 12dB MIN.
- TURN RATIO : (@10KHZ, 1Vrms) PIN 1-4 : PIN 8-5 (6-7 SHORT) = 1 $\pm$ 2%
- LONGITUDINAL BALANCE : @300HZ - 4KHZ = 70dB MIN.
- T.H.D. : (@1.KHZ, 0dBm) = 0.25% MAX.
- HI-POT : (@4KVAC, 1mA, 1MINUTE) PRI-SEC.
- RoHS COMPLIANCE

None tolerance for reference $\pm$ 0.25

					Atech® Atech Technology Co., Ltd. TEL:(02)2794-8867 FAX:(02)2794-8004	TITLE TRANSFORMER		
B	ERASE PIN 2,3	11/23/2005	BART	LYS		SUEDY	DWG. NO. LM-LP-1003L	
A	SPEC	11/07/2005	BART	LYS	SUEDY			
	RELEASE	04/08/2005	pair	Suedy	Suedy	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 04/08/05		DRAW <i>Pair</i>
REVISIONS								