


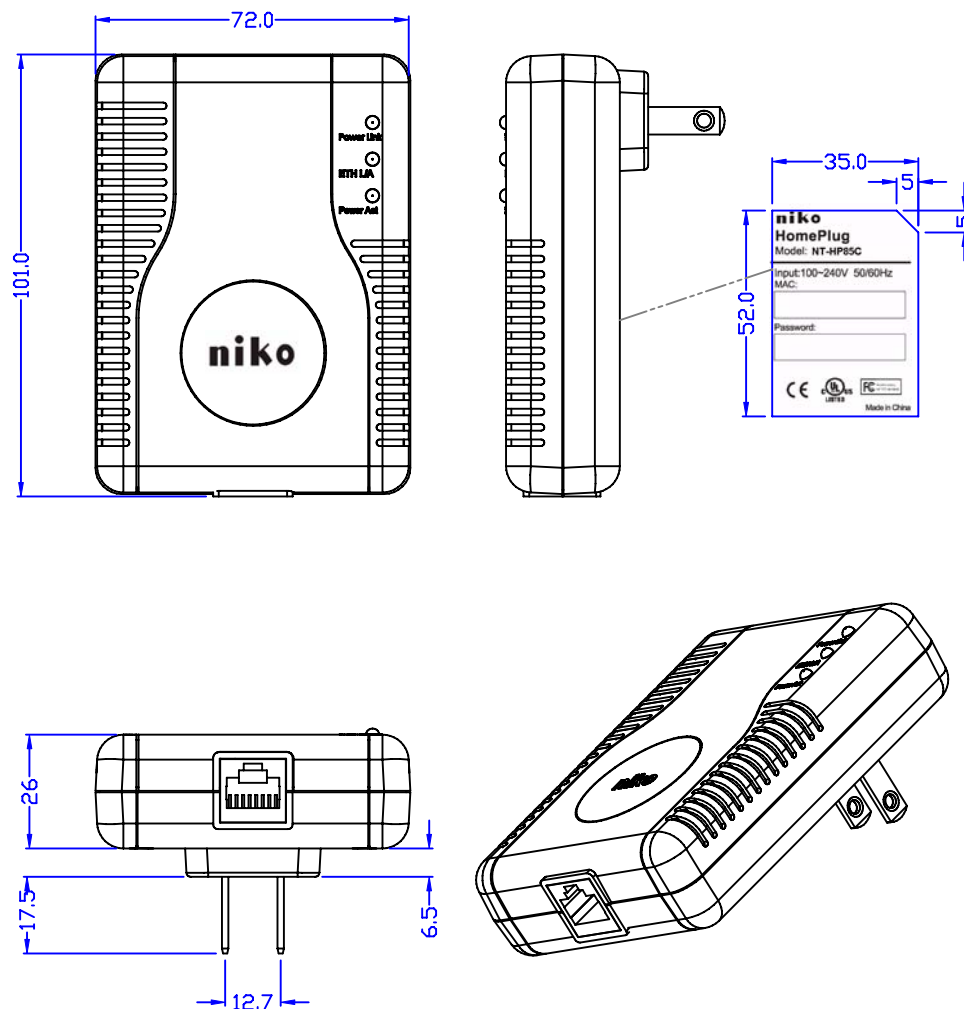

COLOR : WHITE

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 1.0

HomePlug 85M Turbo featureDescription
 HomePlug Turbo compliant
 Up to 85Mbps data rate on the PowerLine
 Effect Data Rate Up to 25Mbps Effective Throughput
 10/100M Fast Ethernet Interface Connection
 Plug and Play
 Peer to Peer Networking
 56-bit Data Encryption Security
 Supports QAM 256/64/16, DQPSK, DBPSK and ROBO modulation
 (QAM 256 for EP-5213)
 Integrated Quality of Service (QoS)

Standard	IEEE 802.3, IEEE 802.3u and HomePlug Turbo
Protocols	Powerline : CSMA/CA Ethernet : CSMA/CD
Media Interface	1 * 10/100M RJ-45 port
Speed	Up to 85Mbps
Effect Data rate	Up to 25Mbps effective throughput
Frequency Band	4.21~23 MHz
Access Methods	CSMA/CA
QoS	4 levels
Encryption	56-bit Data Encryption with key management
Modulation Type	QAM 256/64/16, DQPSK, DBPSK and ROBO modulation
Nodes	Supports up to 15 nodes per network
Operating System	Microsoft Windows 98 SE/ME/NT/2000/XP, MAC, Linux
LED Indicator	Green (1): Powerline link Green (2) : Ethernet link Yellow : Powerline activity
Transmission Range	470 meters
Environmental	Operating: 0°C ~ 70°C
Temperature	Storage: -20°C ~ 70°C
Operating Humidity	Operating: 0 ~ 40%, Non-Condensing Storage: 5%~90%, Non-Condensing
Power Source	90VAC ~260VAC 50/60Hz
Plug type	US Plug

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE <i>Conxant</i>	
								HOMEPLUG	
A	CHANGE CASE	08/16/2006	PAIR	JOHNSON	EUGENE			DWG. NO.	NT-HP85C
	RELEASE	07/25/2006	PAIR	JOHNSON	EUGENE	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		P/N:	DRAW <i>Pair</i>
REVISIONS						07/25/06			