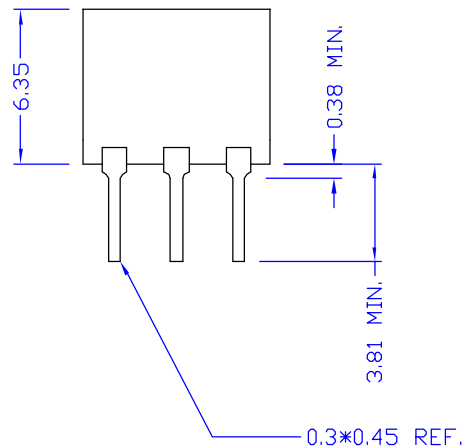
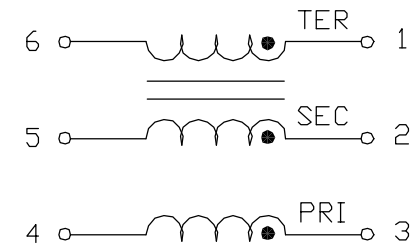
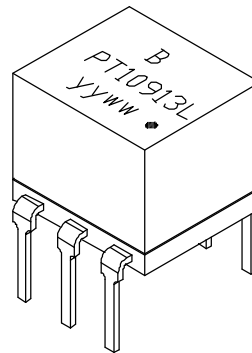
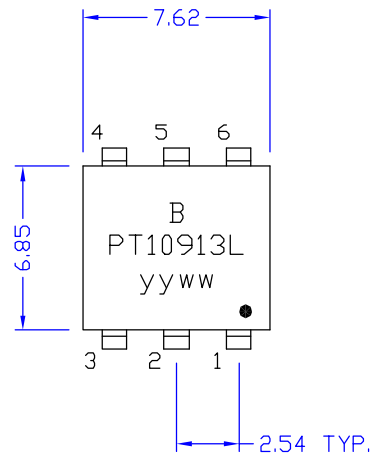


ELECTRICAL CHARACTERISTICS :

- Turns Ratio $\pm 5\%$: 1:1:1
- Primary Pulse Inductance (1,2) :
 μH (MIN) : 40
Pulse Width NSEC for 50% Droop.
- Rise Time (MAX) : 2.0
- ET Product V μSEC (MIN) : 2.0
- Leakage Inductance (MAX) μH : 0.1
- Interwinding Capacitance (MAX) pF : 12
- DCR (MAX) ohms :
 $N1 = 0.16$
 $N2 = 0.16$
- Bandwidth For — 3dB Loss :
Low Freq MHZ = 0.1
Hight Freq MHZ = 150

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004		TITLE RF TRANSFORMER	
								DWG. NO. PT10913L	
	RELEASE	10/14/2005	BART	AL	SUEDY	UNITS: M/M	SAFETY		SHEET 10F 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	DRAW		<i>Pair</i>
REVISIONS						10/14/05			