


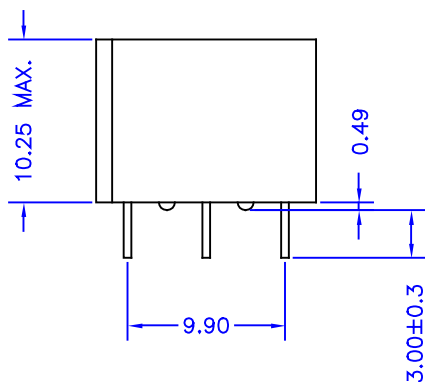
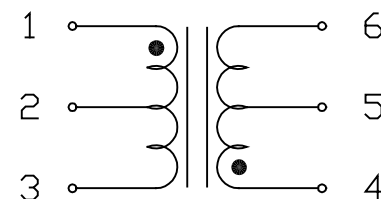



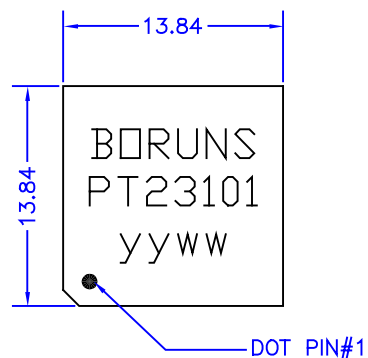

ELECTRICAL CHARACTERISTICS :

1. TURNS RATIO : PIN 1-3:4-6 = 1CT:1CT $\pm 5\%$.
2. $\square$ CL (@10KHZ/0.1Vrms) : PIN 1-3 = 28 mH MIN.
3. CW/W (@100KHZ/0.1Vrms) : PIR-ESC = 130 pF MAX.
4. L.L (@100KHZ/0.1Vrms) : PIN 1-3 = 5 μ H MAX.
5. DCR : PIN 1-3 = 2.4 $\square$ HM $\pm 15\%$.
PIN 4-6 = 2.4 $\square$ HM $\pm 15\%$.
6. HI-POT : 2000Vrms.

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

						Atech [®]		TITLE	ISDN
						Atech Technology Co., Ltd.		TRANSFORMER	
						TEL:(02)788-1958 FAX:(02)788-1960		DWG. NO.	PT23101
RELEASE		08/12/2004	BART	AL	SUEDY	UNITS:	M/M	SAFETY	
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE	08/12/04		
REVISIONS								SHEET	1 OF 1
								DRAW	Pair