


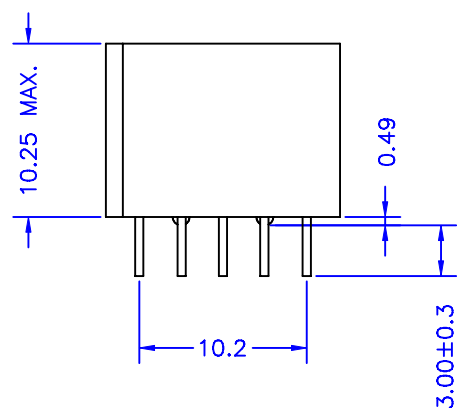
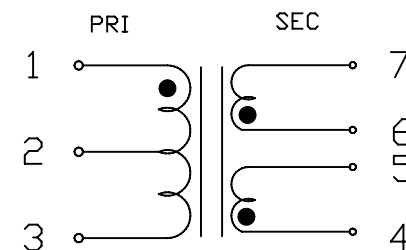
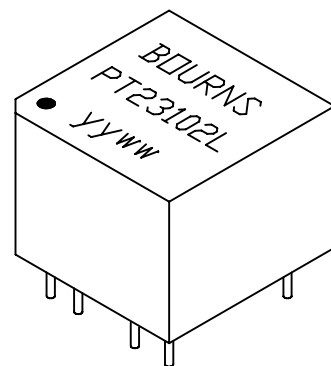


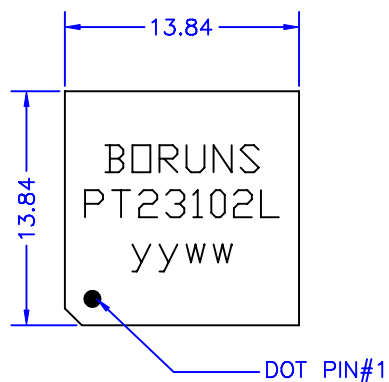

ELECTRICAL CHARACTERISTICS :

1. TURNS RATIO : PIN 1-3:4-6 = 1CT:1CT $\pm 5\%$.
2. OCL (@10KHZ/0.1Vrms) : PIN 1-3 = 28 mH MIN.
3. CW/W (@100KHZ/0.1Vrms) : PIR-ESC = 130 pF MAX.
4. L.L (@100KHZ/0.1Vrms) : PIN 1-3 = 5 μ H MAX.
5. DCR : PIN 1-3 = 2.4 OHM $\pm 15\%$.
PIN 4-6 = 2.4 OHM $\pm 15\%$.
6. HI-POT : 2000Vrms.

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

						Atech® Atech Technology Co., Ltd. TEL:(02)788-1958 FAX:(02)788-1960		TITLE ISDN TRANSFORMER	
								DWG. NO. PT23102L	
	RELEASE	08/20/2007	PAIR	WILLIE	EUGENE	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW
REVISIONS						08/20/07	Pair		