


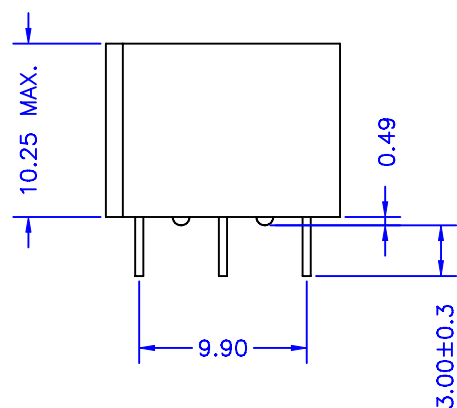
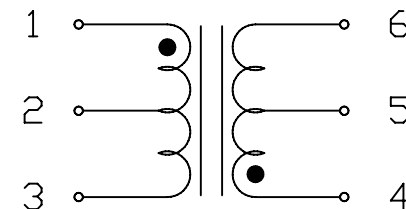
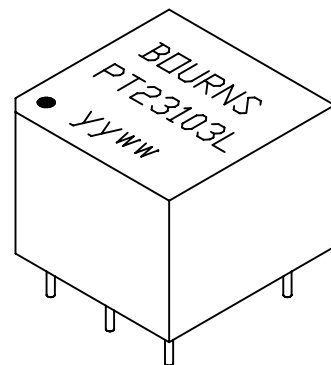


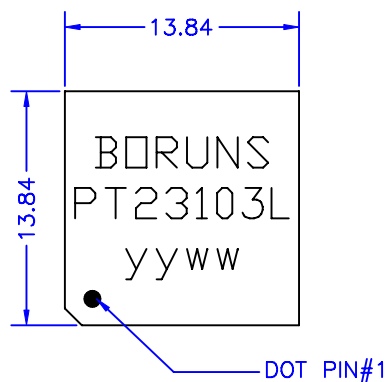

ELECTRICAL CHARACTERISTICS :

1. TURNS RATIO : PIN 1-3:4-6 = 1CT:2CT $\pm 2\%$.
2. $\square$ CL (@10KHZ/0.1Vrms) : PIN 1-3 = 28 mH MIN.
3. CW/W (@100KHZ/0.1Vrms) : PIR-ESC = 120 pF MAX.
4. L.L (@100KHZ/0.1Vrms) : PIN 1-3 = 10 μ H MAX.
5. DCR : PIN 1-3 = 2.5 $\square$ HM $\pm 15\%$.
PIN 4-6 = 4.8 $\square$ HM $\pm 15\%$.
6. HI-POT : 2000Vrms.
7. RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

						Atech®		TITLE	ISDN TRANSFORMER
						Atech Technology Co., Ltd.		DWG. NO.	PT23103L
						TEL:(02)788-1958 FAX:(02)788-1960			
RELEASE		09/16/2006	PAIR	WILLIE	EUGENE	UNITS:	SAFETY		
NO. DESCRIPTION		DATE	BY	CHK	APPD	M/M			SHEET 1 OF 1
REVISIONS						DATE	P/N:	DRAW	
						09/19/06	CTS90000DD	Pair	