
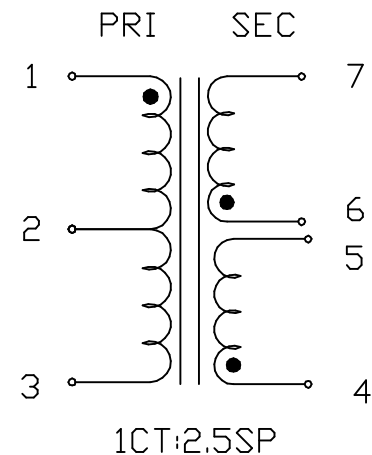

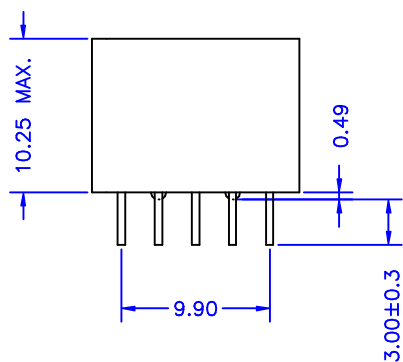



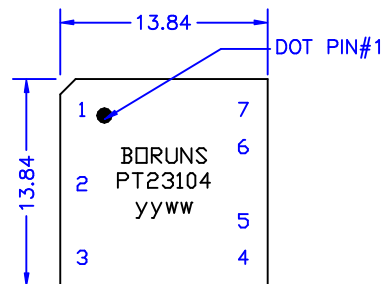

## ELECTRICAL CHARACTERISTICS :

1. TURNS RATIO : 1CT:2.5SP  $\pm 2\%$ .
2. DCL PRI : 28 mH MIN.
3. CW/W : 125 pF MAX.
4. L.L SEC : 12 uH MAX.
5. DCR : PRI = 2.5 OHM  $\pm 25\%$ .  
SEC = 5.5 OHM  $\pm 25\%$ .
6. HI-POT : 2000 Vrms.

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE  $\pm 0.25$

|           |             |            |      |     |                                   |            |                        |  |
|-----------|-------------|------------|------|-----|-----------------------------------|------------|------------------------|--|
|           |             |            |      |     | <b>Atech®</b>                     |            | TITLE ISDN TRANSFORMER |  |
|           |             |            |      |     | Atech Technology Co., Ltd.        |            | DWG. NO. PT23104       |  |
|           |             |            |      |     | TEL:(02)788-1956 FAX:(02)788-1960 |            |                        |  |
| RELEASE   |             | 01/12/2005 | BART | AL  | SUEDY                             | UNITS: M/M | SAFETY                 |  |
| NO        | DESCRIPTION | DATE       | BY   | CHK | APPD                              | DATE       | SHEET 1 OF 1           |  |
| REVISIONS |             |            |      |     |                                   | 01/12/05   | DRAW Pair              |  |