
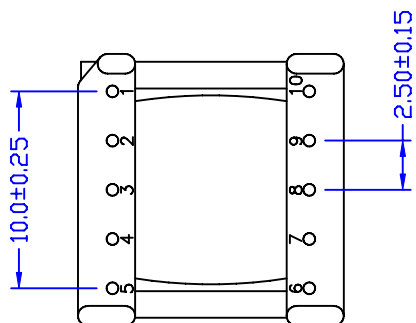
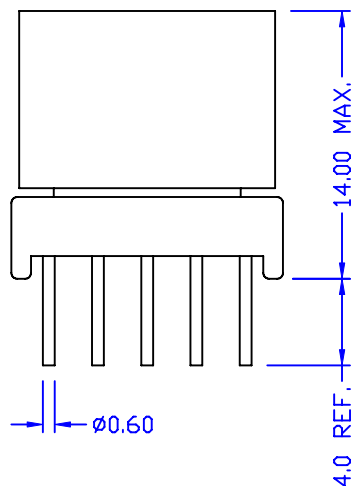
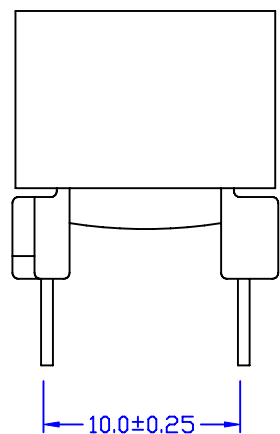
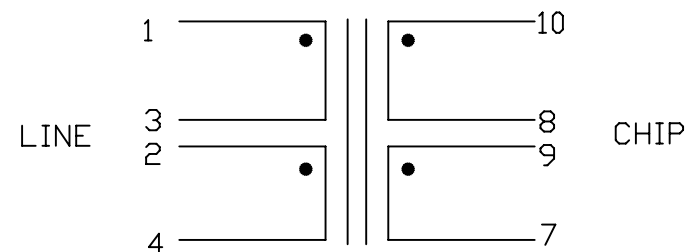


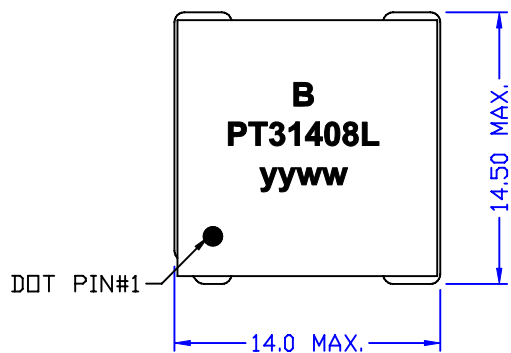

ELECTRICAL CHARACTERISTICS :

1. D.C.R. : PIN 1-4 (2-3 SHORT) = 1.26 OHM MAX.
PIN 7-10 (8-9 SHORT) = 8 OHM MAX.
2. INDUCTANCE (10KHz, 0.1Vrms) : PIN 1-4 (2-3 SHORT) = 1.8mH MIN.
3. LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms) :
PIN 1-4 (2-3, 7-8-9-10 SHORT) = 10uH TYP.
4. T.H.D (@100 OHM) @ 30KHZ = 80dB MIN.
@ 300 KHZ = 60dB MIN.
5. LONGITUDINAL BALANCE (@20KHZ~1MHZ) = 50 dB MIN.
6. TURN RATIO (@200KHz, 0.1Vrms) :
PIN 10-7 : PIN 1-4 (2-3, 8-9 SHORT) = 1.8 ±3%
7. HI-POT (@1875VAC, 1mA, 2SEC) : PRI-SEC
8. RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE		
								TRANSFORMER		
								DWG. NO.		
									PT31408L	
	RELEASE	10/05/2006	PAIR	MICHAEL	EUGENE	UNITS: M/M		SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE				DRAW
REVISIONS						10/05/26				Pair