
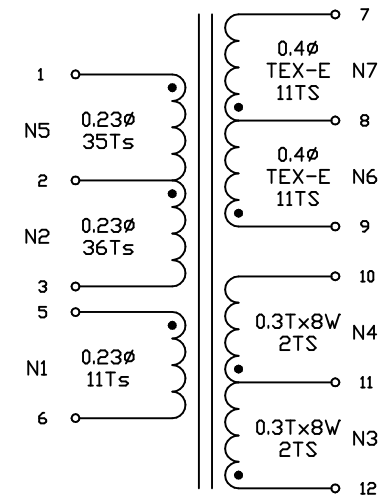


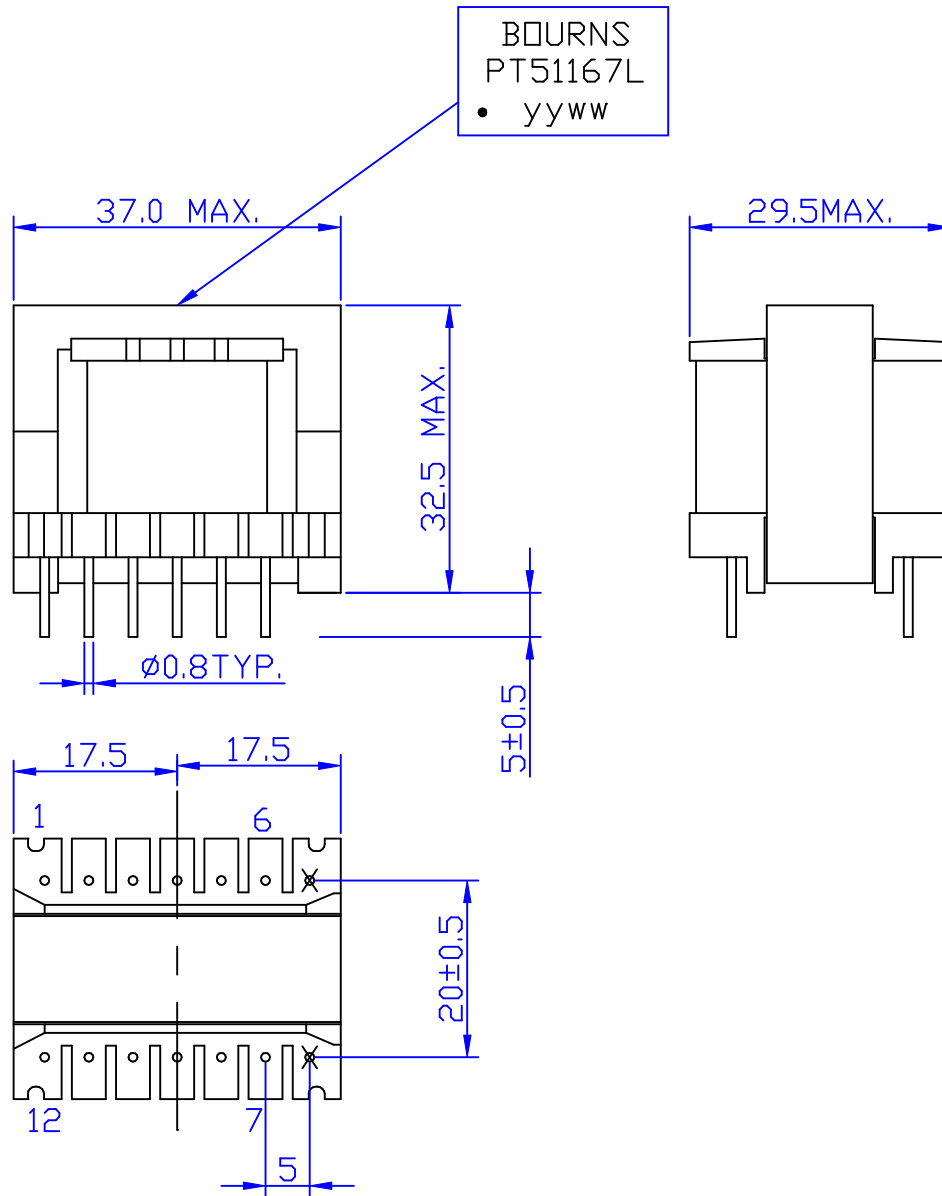

ELECTRICAL CHARACTERISTICS :

- INDUCTANCE : (<50KHz, 0.1V) :
 L : (PIN 3-1) = 900 μ H $\pm$ 10%.
- LEAKAGE INDUCTANCE (<50KHz, 0.1V) :
 LK : (PIN 3-1) = 25 μ H MAX.
- DCR (<25°C) :
 R : (PIN 3-1) = 2.35 Ω MAX.
 R : (PIN 3-2) = 1030 m Ω MAX.
 R : (PIN 5-6) = 320 m Ω MAX.
 R : (PIN 12-10) = 5.0 m Ω MAX.
 R : (PIN 12-11) = 3.4 m Ω MAX.
 R : (PIN 9-7) = 300 m Ω MAX.
 R : (PIN 9-8) = 150 m Ω MAX.
- HI-POT (<50Hz, 5mA, 1MIN.) :
 P-S : 3.0 KV AC.
 P-C : 2.0 KV AC.
 S-C : 1.0 KV AC.
- INSULATION :
 PRI-SEC/PRI-CORE/SEC-CORE.
 100M Ω MIN AT 500VDC
- RoHS COMPLIANCE.

						Atech®		TITLE
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL:02)2794-6667 FAX:02)2794-8004		DWG. NO.
								PT51167L
A	CHANGE BOBBIN	02/27/2006	PAIR	AL	EUGENE	UNITS:	SAFETY	SHEET 1 OF 1
	RELEASE	12/09/2005	BART	AL	SUEDY	M/M		
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	DRAW	Pair
REVISIONS						12/09/05		