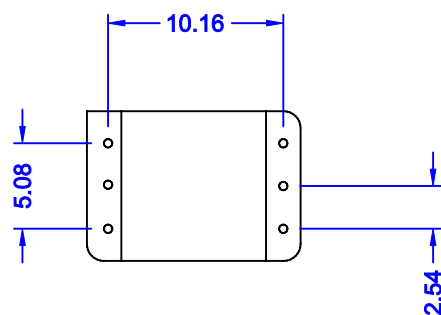

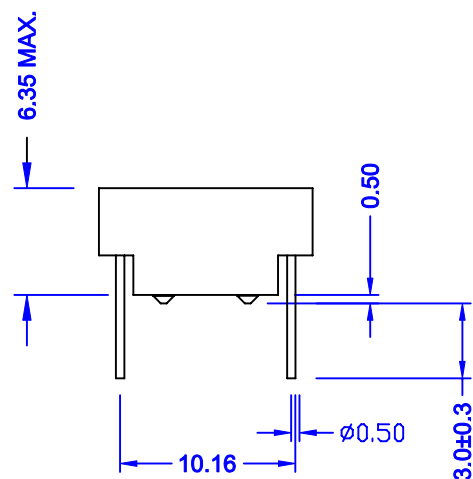

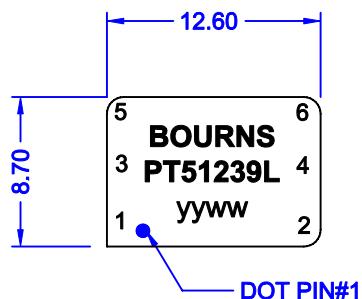


ELECTRICAL CHARACTERISTICS (@25°C) :

1. INDUCTANCE (@100KHZ,0.1V,Ls) : 1-5 = 400uH±30%
2. LEAKAGE INDUCTANCE(@100KHZ,0.1V,Ls) : 1-5 (2,4,6 SHORT) = 0.3uH MAX.
3. D.C.R : 1-5 = 0.125 OHM MAX.
2-6 = 0.170 OHM MAX.
4. TURNS RATIO : 1-5 : 2-6 = 1.0 : 2.0 ±2%
5. HI-POT : PRI TO SEC = 4000VAC
6. RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

						Bourns Inductive Solution		TITLE TRANSFORMER	
								DWG. NO. PT51239L	
	RELEASE	11/22 /2007	Pair	Willie	Eugene	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:		DRAW Pair
REVISIONS						11/22/07			