
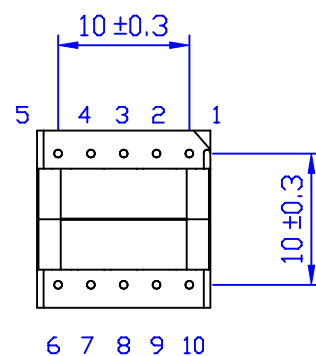

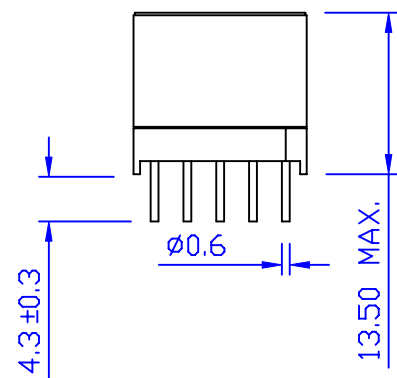
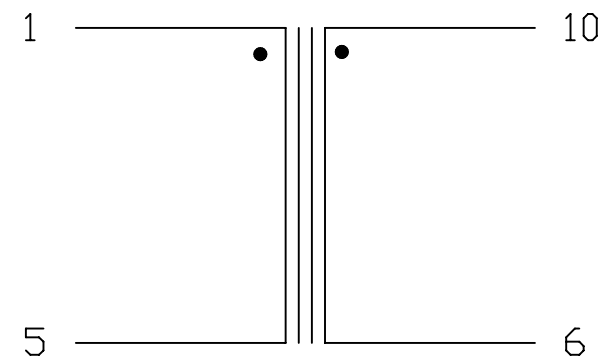



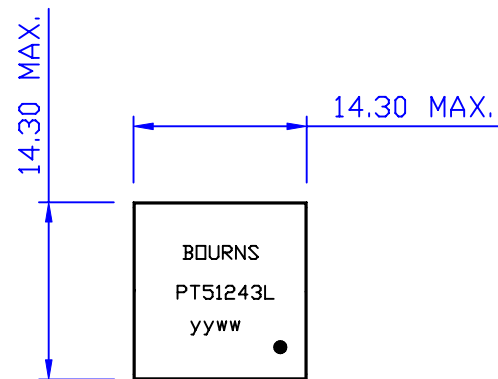

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-5 = 0.23 Ω HM MAX.
PIN 6-10 = 67 Ω HM MAX.
- INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-5 = 40uH $\pm$ 30%.
- TURN RATIO (@5KHZ, 0.1Vrms) :
PIN 10-6 : 1-5 = 110 $\pm$ 6%.
- HI-POT (@1KVAC, 1mA, 1MIN) :
PRI-SEC, SEC-CORE
- RoHS COMPLIANT

						Bourns Inductive Solution		TITLE TRANSFORMER	
								DWG. NO. PT51243L	
	RELEASE	01/21/2008	Pair	Michael	Eugene	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:		DRAW Pair
REVISIONS						01/21/08			