
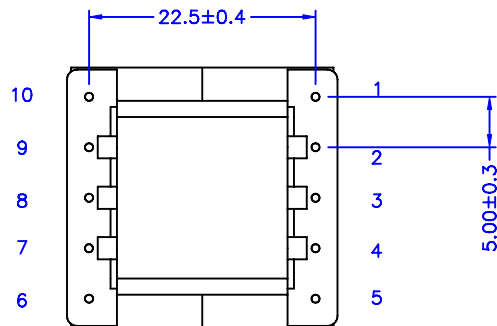

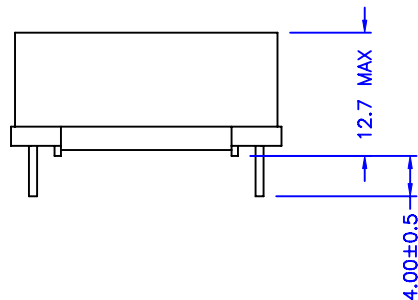




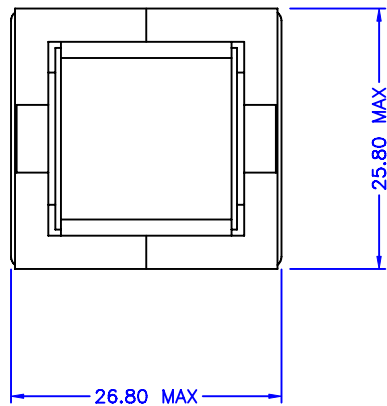

ELECTRICAL CHARACTERISTICS:

- DCR: 1-2 = 70mΩ MAX.
2-3 = 70mΩ MAX.
6-10 = 2.18 Ω MAX.
- INDUCTANCE (@10KHZ, 0.1Vrms) :
1-2 = 390 μH ± 25%.
- TURN RATIO : (@100KHZ, 0.1Vrms)
1-2:2-3 = 1 ± 2%.
10-6:1-3 = 4.428 ± 2%.
- HI-POT (@1500VAC, 1mA, 1MIN) :
PRI-SEC
- RoHS COMPLIANT

						Bourns Inductive Solution		TITLE TRANSFORMER
								DWG. NO. PT51250L
A	INDUCTANCE	08/04/2008	PAIR	WILLIE	EUGENE	UNITS: M/M		SAFETY
	RELEASE	04/29/2008	Pair	Willie	Eugene			SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW
REVISIONS						04/29/08	CTW125000A	<i>Pair</i>