
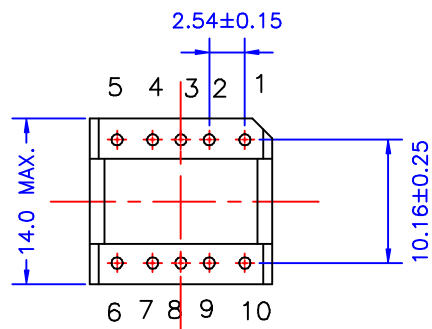
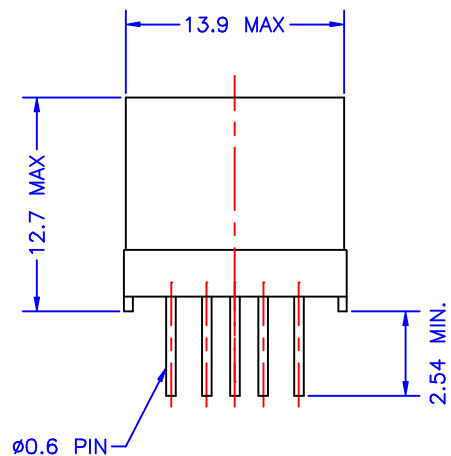
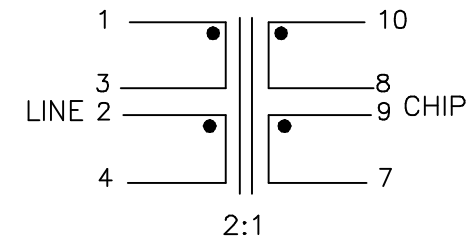



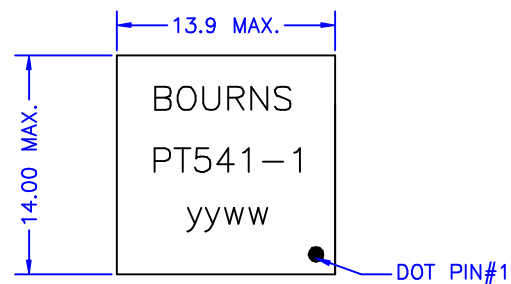

ELECTRICAL CHARACTERISTICS : (B2068 COMPATIBLE)

- DCR : PIN10-8 = PIN9-7 = 0.08 OHM MAX.
PIN3-1 = PIN4-2 = 0.13 OHM MAX.
- INDUCTANCE (@10KHz, 0.1Vrms, W/H 2-3 SHORT)
1-4 = 410uH ± 10%
- LEAKAGE (@100KHz, 0.1Vrms, W/H 2-3, 8-9, 10-7 SHORT)
1-4 = 6.5 uH MAX.
- TURNS RATIO (@40KHz, 1Vrms)
1-3 : 2-4 = 1 ± 1%
10-8 : 9-7 = 1 ± 1%
1-4 (2-3 SHORT) : 10-7 (8-9 SHORT) = 2 ± 1%
- INSERTION LOSS (@0.1-1.1 MHz) : 1.0 dB MAX.
- THD (@20 KHz) : -72 dB MAX.
- HI-POT (@1500VAC, 1mA, 2SEC) PRI-SEC

						Atech®		TITLE	ADSL TRANSFORMER
						Atech Technology Co., Ltd.		DWG. NO.	PT541-1
						TEL:(02)788-1958 FAX:(02)788-1960			
A	LABEL	02/17/2005	BART	MICHAEL	SUEDY	UNITS:	M/M	SAFETY	SHEET 1 OF 1
	RELEASE	12/01/03	BART	PAIR	SUEDY				
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	12/01/03		DRAW
REVISIONS									Pair