
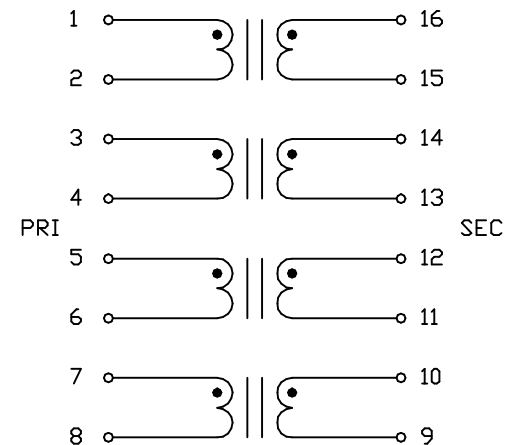
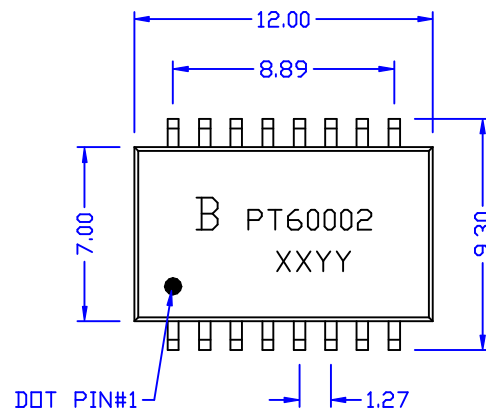


ELECTRICAL SPECIFICATIONS @ 25°C :

1. TURNS RATIO : 1 : 1
2. PRI SINE WAVE OCL : 200uH $\pm$ 20%
3. RISE & FALL TIME : 1.8nS MAX.
4. CW/W : 15pF MAX.
5. L.L : 0.2uH MAX.
6. DCR : 0.4 OHM MAX.
7. HI-POT : 1500Vrms

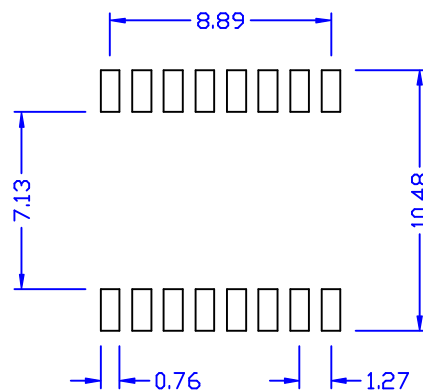

TOLERANCES : XX.X $\pm$ 0.25
X.XX $\pm$ 0.05

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE 10 BASE-T TRANSFORMER	
								DWG. NO. PT60002	
	RELEASE	06/05/2002	DOLLY	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						06/05/02			