
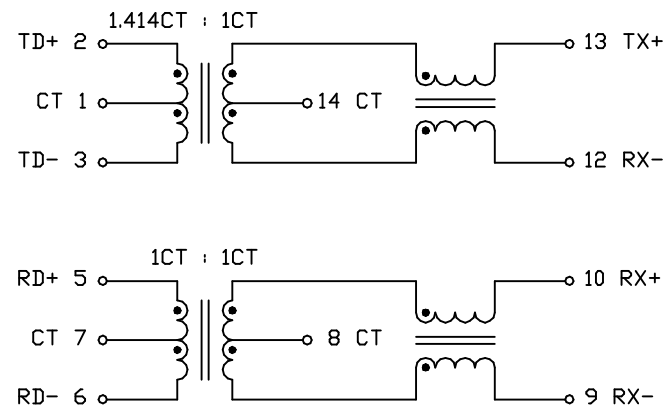


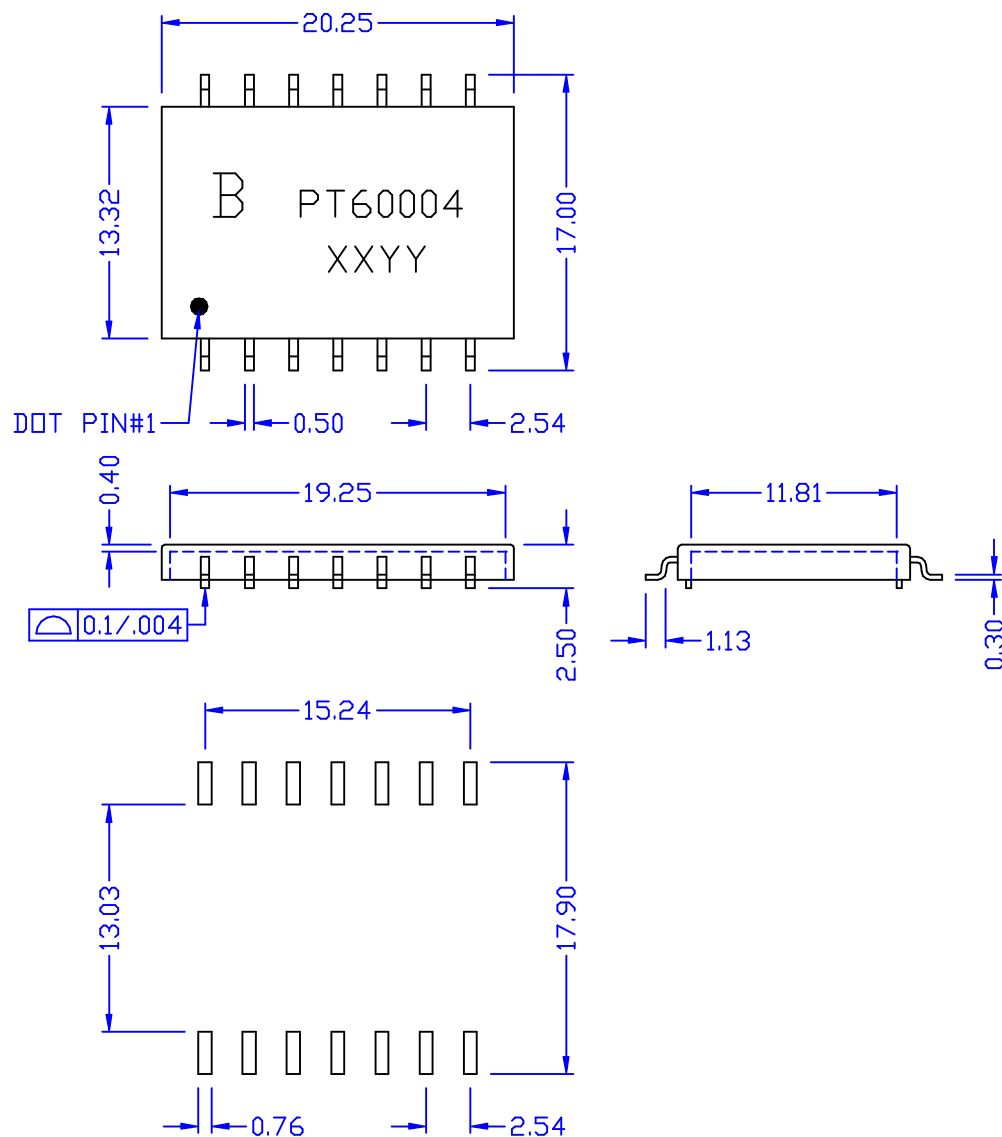

ELECTRICAL SPECIFICATIONS @ 25°C :

1. TURNS RATIO : TX : 1.414CT : 1CT
RX : 1CT : 1CT
2. DCL <100KHZ, 0.1V WITH 8mA/DC BIAS> : 350uH MIN.
3. RISE & FALL TIME : 2.5nS MAX.
4. HI-POT : 1500Vrms
5. INSERTION LOSS <1-100MHZ> : -1.0dB MAX.
6. RETURN LOSS TX/RX : 1-60MHZ = -15/-15dB MIN.
60-100MHZ = -10/-10dB MIN.
7. CROSS TALK : 1-60MHZ = -40dB MIN.
60-100MHZ = -35dB MIN.
8. DCMRR TX/RX : 1-60MHZ = -45/-40dB MIN.
60-100MHZ = -40/-35dB MIN.

TOLERANCES : XX.X ± 0.25
X.XX ± 0.05

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE 10/100 BASE-TX TRANSFORMER	
							DWG. NO. PT60004	
	RELEASE	06/25/2002	DOLLY	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						06/25/02		