
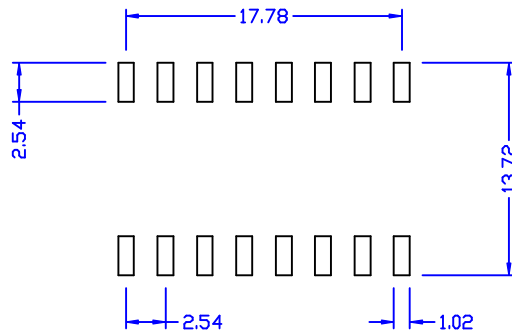

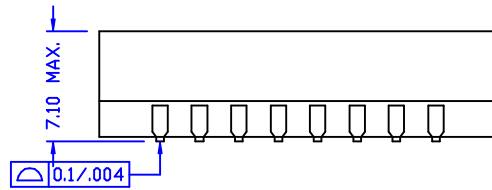
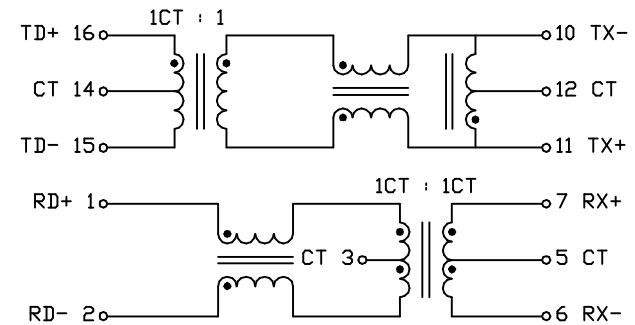


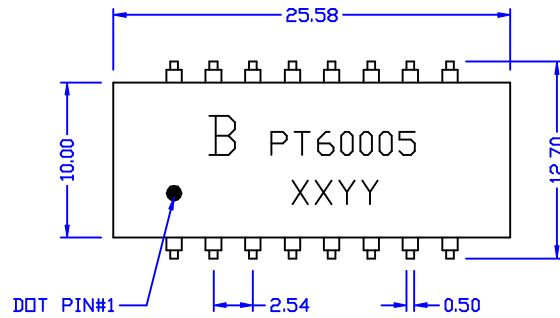

ELECTRICAL SPECIFICATIONS @ 25°C :

1. TURNS RATIO : TX = 1CT : 1
RX = 1CT : 1CT
2. OCL (100KHZ/0.1V WITH 8mA/DC BIAS) : 350uH MIN.
3. RISE & FALL TIME : 2.5nS MAX.
4. HI-PDT : 1500Vrms
5. CROSS TALK : 1-60MHZ = -40dB MIN.
60-100MHZ = -36dB MIN.
6. INSERTION LOSS (0.1-125MHZ) : -1.1dB MAX.
7. RETURN LOSS TX/RX : 0.1-60MHZ = -18/-17dB MIN.
60-100MHZ = -14/-13dB MIN.
8. DCMRR TX/RX : 0.1-60MHZ = -42/-40dB MIN.
60-100MHZ = -40/-35dB MIN.

TOLERANCES : XX.X ± 0.25
X.XX ± 0.05

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE 10/100 BASE-T TRANSFORMER	
								DWG. NO. PT60005	
	RELEASE	06/05/2002	DOLLY	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 10F 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						06/05/02			