

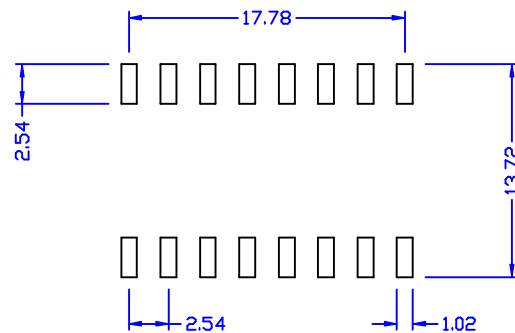

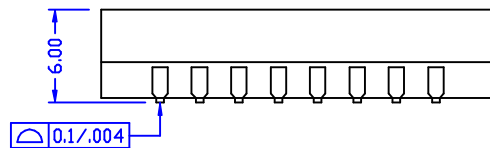


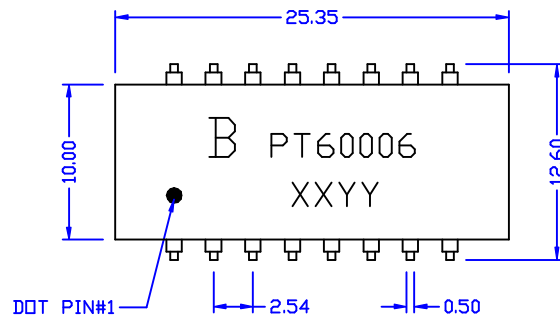

TOLERANCES : XX.X $\pm$ 0.25
X.XX $\pm$ 0.05

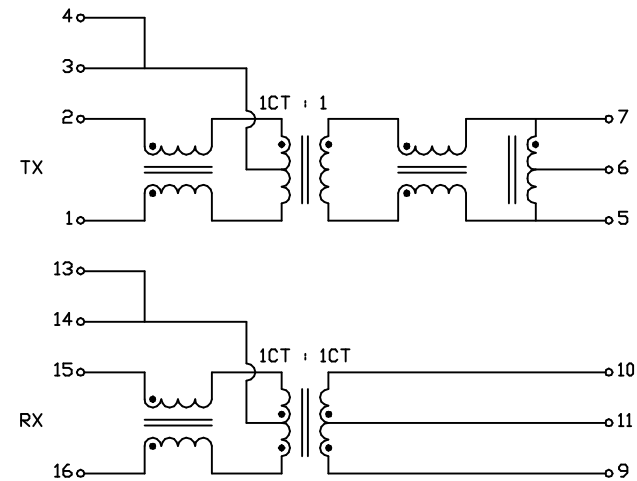

ELECTRICAL SPECIFICATIONS @ 25°C :

1. TURNS RATIO : TX = 1CT : 1
RX = 1CT : 1CT
2. OCL (100KHZ/0.1V WITH 8mA/DC BIAS) : 350uH MIN.
3. RISE & FALL TIME : 2.5nS MAX.
4. HI-PDT : 1500Vrms
5. CROSS TALK : 1-60MHZ = -40dB MIN.
60-100MHZ = -36dB MIN.
6. INSERTION LOSS (0.1-125MHZ) : -1.1dB MAX.
7. RETURN LOSS TX/RX : 0.1-60MHZ = -17/-15dB MIN.
60-100MHZ = -15/-11dB MIN.
8. DCMRR TX/RX : 0.1-60MHZ = -45/-40dB MIN.
60-100MHZ = -40/-38dB MIN.

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE 100 BASE-TX TRANSFORMER	
								DWG. NO. PT60006	
	RELEASE	06/05/2002	DOLLY	AL	SUEDY	UNITS:	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	M/M			
REVISIONS						DATE			DRAW Pair
						06/05/02			