



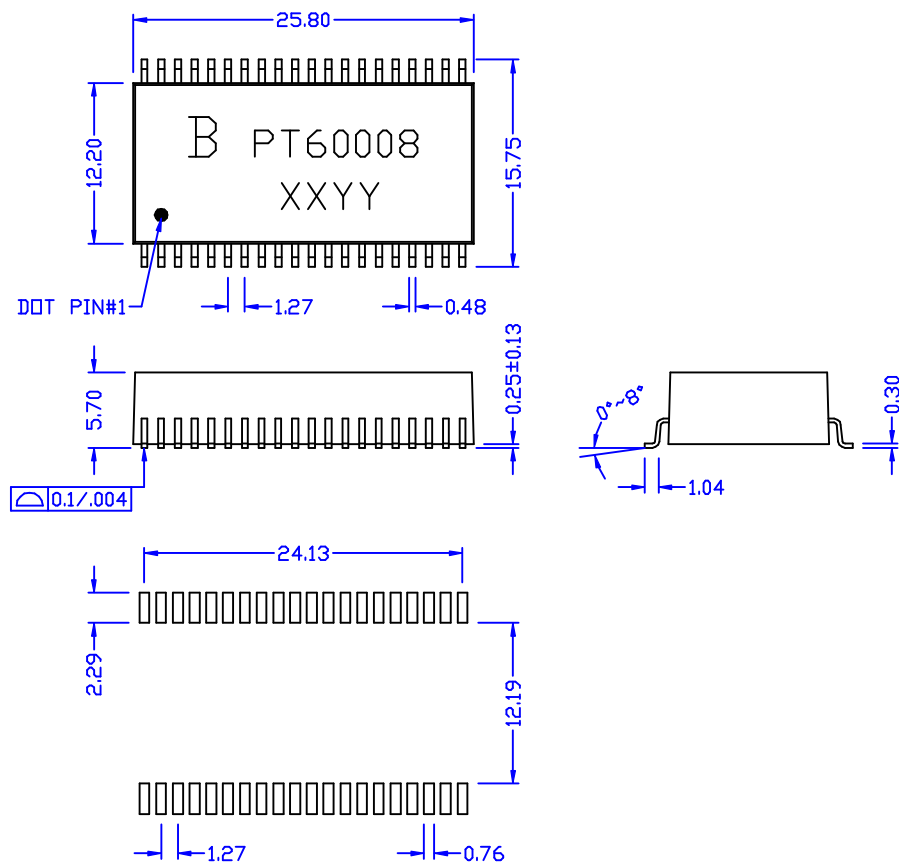

TOLERANCES : XX.X ± 0.25
 X.XX ± 0.05

ELECTRICAL SPECIFICATIONS @ 25°C :

1. TURNS RATIO : TX = 2CT : 1CT
RX = 1 : 1
2. OCL (100KHZ/0.1V WITH 8mA DC BIAS) : 350uH MIN.
3. RISE & FALL TIME : 5.0nS MAX.
4. HI-POT : 1500Vrms
5. INSERTION LOSS : 1-60MHZ = -1.0dB MAX.
6. RETURN LOSS TX/RX : 1-30MHZ = -18dB MIN.
60-80MHZ = -12dB MIN.
7. DCMRR TX/RX : 1-30MHZ = -18dB MIN.
60-80MHZ = -12dB MIN.
8. CROSS TALK : 1-60MHZ = -40dB MIN.
60-100MHZ = -35dB MIN.

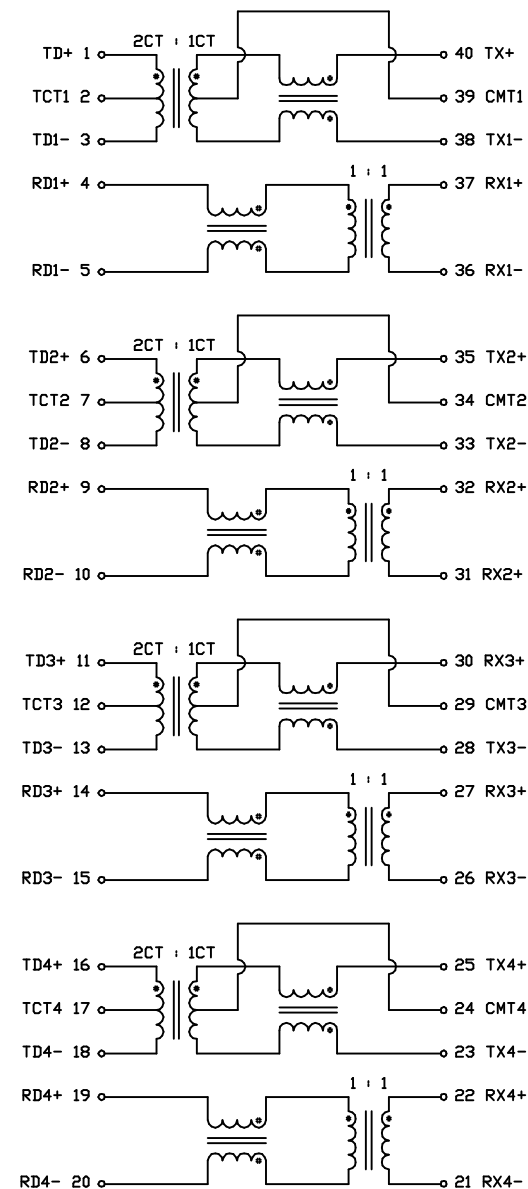

						Atech® Atech Technology Co., Ltd. TEL: 02-2794-6667 FAX: 02-2794-8004	TITLE 10/100 BASE-TX TRANSFORMER	
							DWG. NO. PT60008	
	RELEASE	06/25/2002	DOLLY	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						06/25/02		