



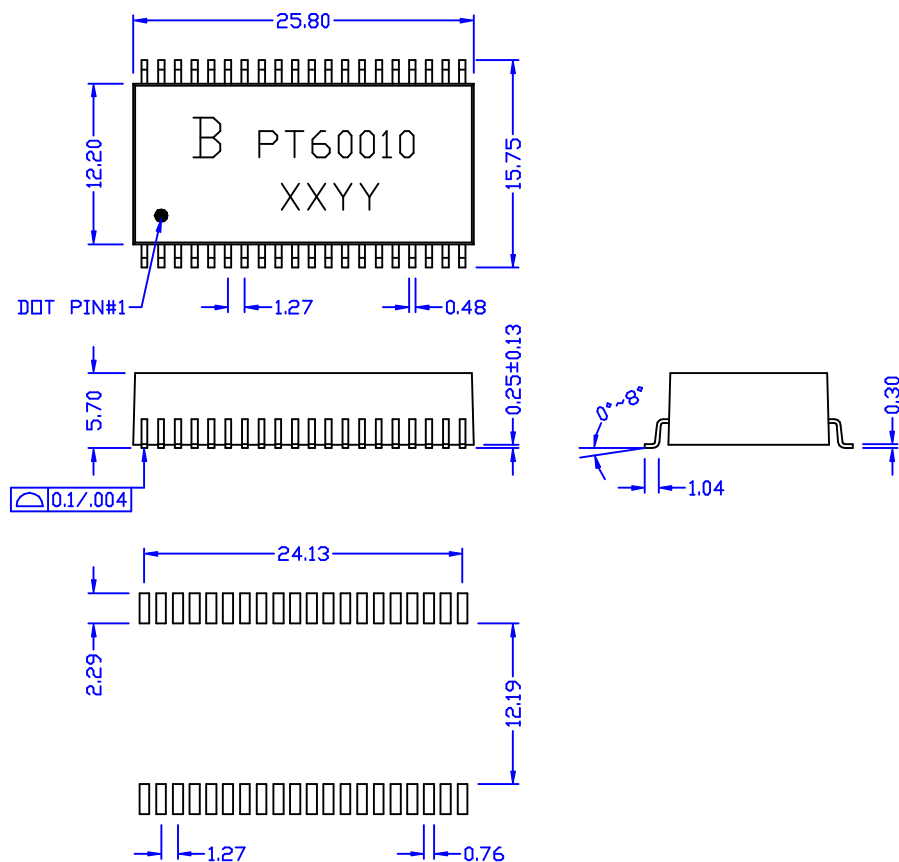

TOLERANCES : XX.X ± 0.25
X.XX ± 0.05

ELECTRICAL SPECIFICATIONS @ 25°C :

1. TURNS RATIO : TX = 1.414CT : 1CT
RX = 1 : 1
2. OCL (100KHZ/0.1V WITH 8mA DC BIAS) : 350uH MIN.
3. RISE & FALL TIME : 5.0nS MAX.
4. HI-POT : 1500Vrms
5. INSERTION LOSS : 1-125MHZ = -1.1dB MAX.
6. RETURN LOSS TX/RX : 1-60MHZ = -15/-16dB MIN.
60-100MHZ = -12/-13dB MIN.
7. DCMRR TX/RX : 1-60MHZ = -45/-40dB MIN.
60-100MHZ = -40/-35dB MIN.
8. CROSS TALK : 1-60MHZ = -38dB MIN.
60-100MHZ = -35dB MIN.

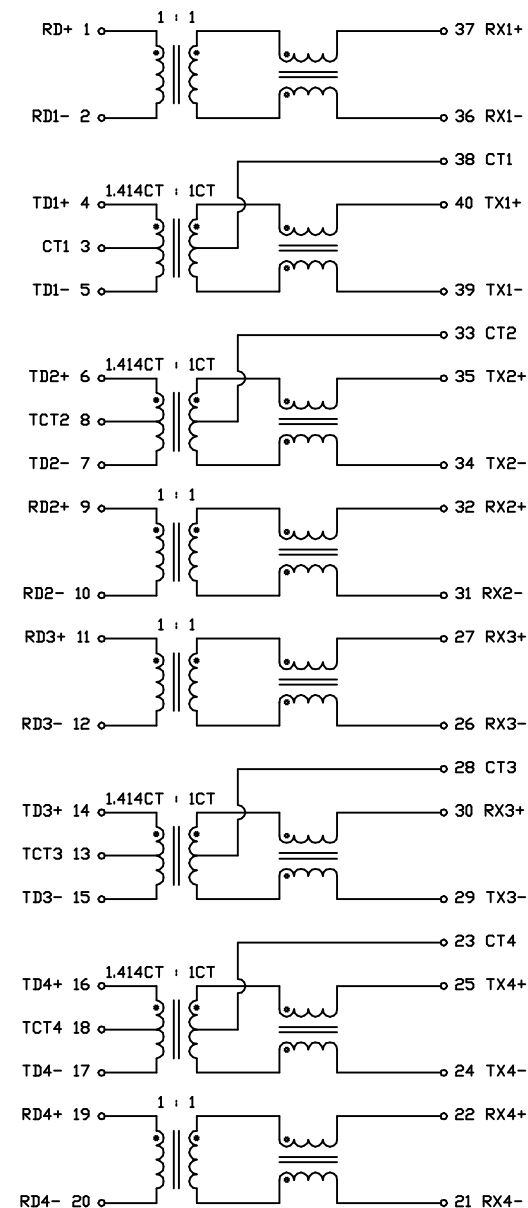

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE 10/100 BASE-TX TRANSFORMER	
								DWG. NO. PT60010	
	RELEASE	06/06/2002	DOLLY	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						06/06/02			