

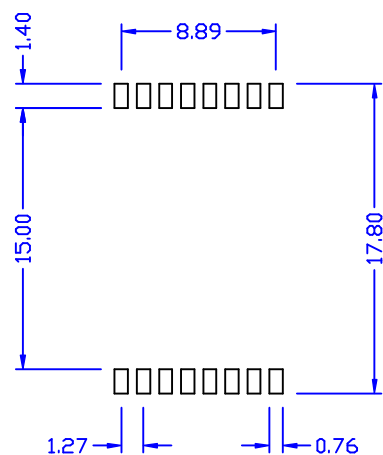
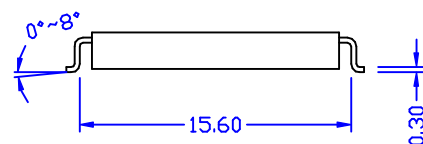
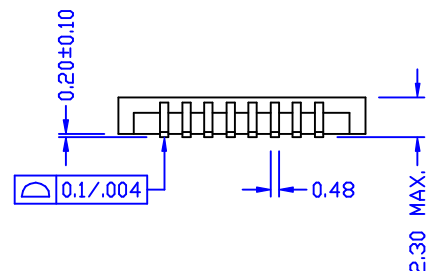


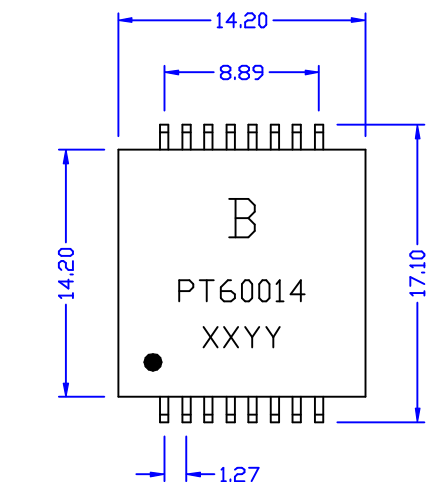

TOLERANCES : XX.X ± 0.25
X.XX ± 0.05

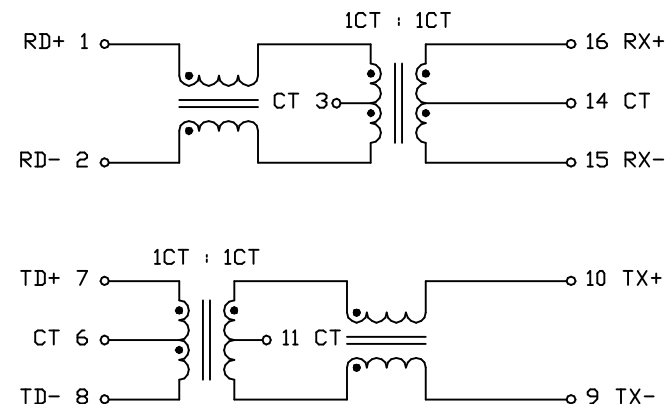

ELECTRICAL SPECIFICATIONS @ 25°C :

1. TURNS RATIO : TX : 1CT : 1CT
RX : 1CT : 1CT
2. OCL (100KHZ, 0.1V WITH 8mA/DC BIAS) : 350uH MIN.
3. RISE & FALL TIME : 3.0nS MAX.
4. HI-POT : 1500Vrms
5. INSERTION LOSS (1-100MHZ) : -1.3dB MAX.
6. CROSS TALK : 1-60MHZ = -40dB MIN.
60-100MHZ = -35dB MIN.
7. RETURN LOSS TX/RX : 1-60MHZ = -12/-12dB MIN.
60-100MHZ = -11/-11dB MIN.
8. DCMRR TX/RX : 1-60MHZ = -40/-40dB MIN.
60-100MHZ = -30/-38dB MIN.

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE 10/100 BASE- TRANSFORMER	
							DWG. NO. PT60014	
	RELEASE	06/10/2002	DOLLY	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		
REVISIONS						06/10/02		
							DRAW	Pair