

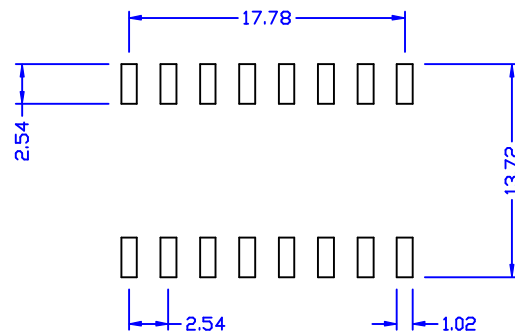

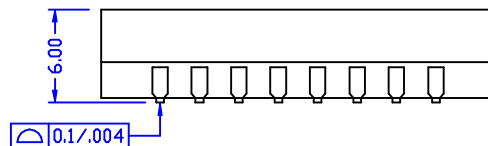
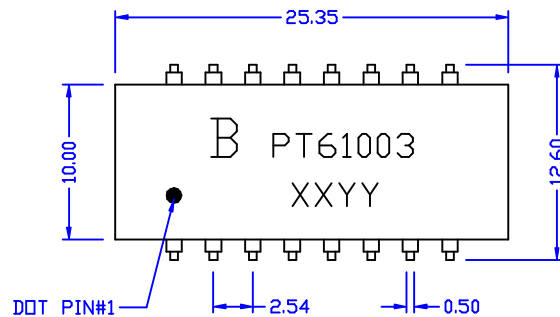


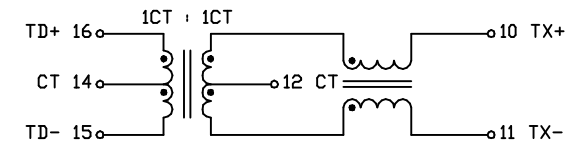

TOLERANCES : XX.X $\pm$ 0.25
X.XX $\pm$ 0.05

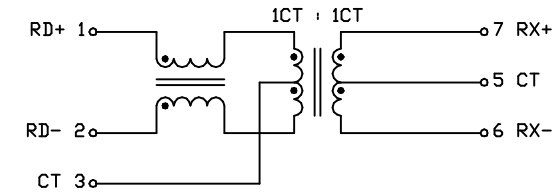

ELECTRICAL SPECIFICATIONS @ 25°C :

1. TURNS RATIO : TX = 1CT : 1CT
RX = 1CT : 1CT
2. DCL (100KHZ/0.1V WITH 8mA/DC BIAS) : 350uH MIN.
3. RISE & FALL TIME : 2.5nS TYP.
4. HI-PDT : 1500Vrms
5. INSERTION LOSS : 1-125MHZ = -1.0dB MAX.
6. RETURN LOSS TX/RX : 1-60MHZ = -18/-18dB MIN.
60-100MHZ = -12/-12dB MIN.
7. CROSS TALK : 1-60MHZ = -40dB MIN.
60-100MHZ = -30dB MIN.
8. DCMRR TX/RX : 1-60MHZ = -40/-40dB MIN.
60-100MHZ = -35/-35dB MIN.

						Atech® Atech Technology Co., Ltd. TEL:0228794-6667 FAX:0228794-8004		TITLE 10/100 BASE-TX TRANSFORMER	
								DWG. NO. PT61003	
	RELEASE	06/25/2002	DOLLY	AL	SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW
REVISIONS						06/25/02			