
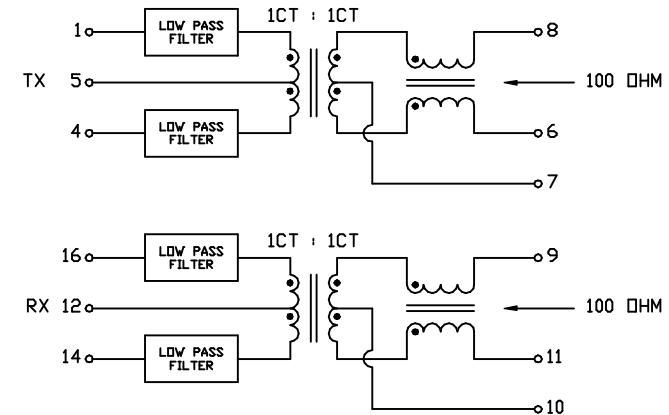


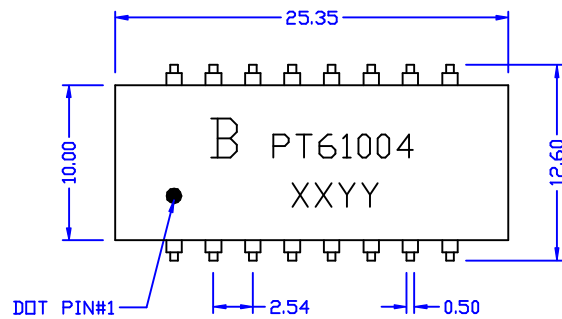

ELECTRICAL SPECIFICATIONS @ 25°C :

1. TURNS RATIO ($\pm 5\%$) : TX = 1CT : 1CT
RX = 1CT : 1CT
2. HI-POT : 1500Vrms
3. INSERTION LOSS : (1-10MHZ) = -1.0dB MAX.
4. ATTENUATION : 30MHZ = -30dB MIN.
40MHZ = -35dB MIN.
100MHZ = -35dB MIN.
5. RETURN LOSS 5-10MHZ : 100 OHM = -18dB MIN.
98 $\pm$ 12 OHM = -15dB MIN.
6. CROSS TALK : 5-10MHZ = -35dB MIN.
7. COMMON MODE REJECTION : 5MHZ = -60dB MIN.
10MHZ = -60dB MIN.
50MHZ = -55dB MIN.
100MHZ = -50dB MIN.
200MHZ = -45dB MIN.

TOLERANCES : XX.X $\pm$ 0.25
X.XX $\pm$ 0.05

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE 10 BASE-T FILTER INTERFACE	
								DWG. NO. PT61004	
	RELEASE	06/19/2002	DOLLY	AL	SUEBY	UNITS: M/M		SAFETY	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 06/19/02			
REVISIONS								SHEET 10F 1	
								DRAW Pair	