

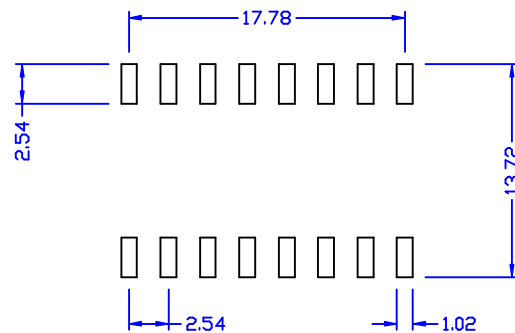

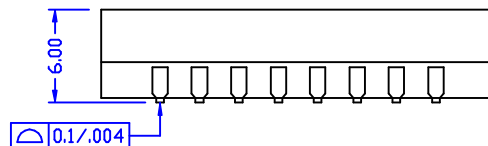


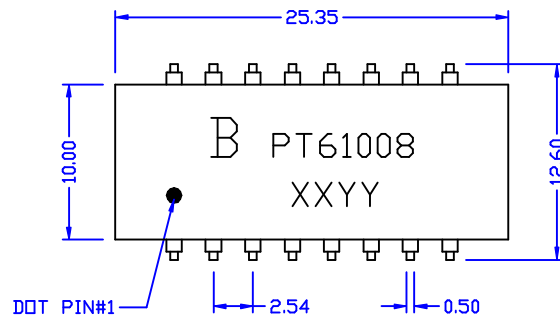

TOLERANCES : XX.X $\pm$ 0.25
X.XX $\pm$ 0.05

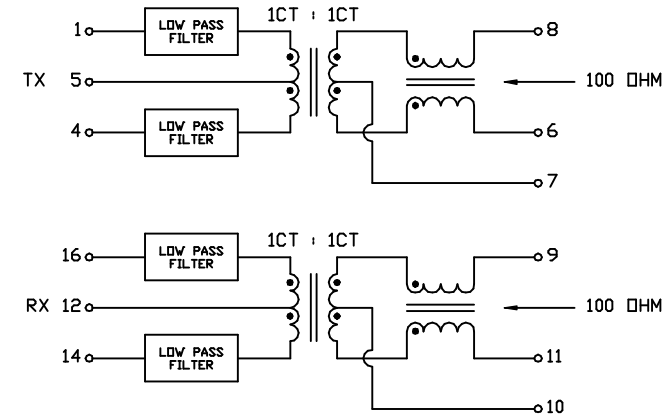

ELECTRICAL SPECIFICATIONS @ 25°C :

1. TURNS RATIO ($\pm 5\%$) : TX = 1CT : 1CT
RX = 1CT : 1CT
2. HI-POT : 1500Vrms
3. INSERTION LOSS : (1-10MHZ) = -6.0dB MAX.
4. ATTENUATION : 20MHZ = -5dB MIN.
25MHZ = -11dB MIN.
30MHZ = -16dB MIN.
40MHZ = -26dB MIN.
5. RETURN LOSS 5-10MHZ : 100 OHM = -15dB MIN.
98 $\pm$ 12 OHM = -13dB MIN.
6. CROSS TALK : 5-10MHZ = -35dB MIN.
7. COMMON MODE REJECTION : 5-10MHZ = -30dB MIN.
10-50MHZ = -25dB MIN.

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8084		TITLE 10 BASE-T FILTER INTERFACE	
								DWG. NO. PT61008	
	RELEASE	06/19 /2002	DOLLY	AL	SUEDY	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 06/19/02			
REVISIONS								SHEET 1OF 1	
								DRAW <i>Pair</i>	