
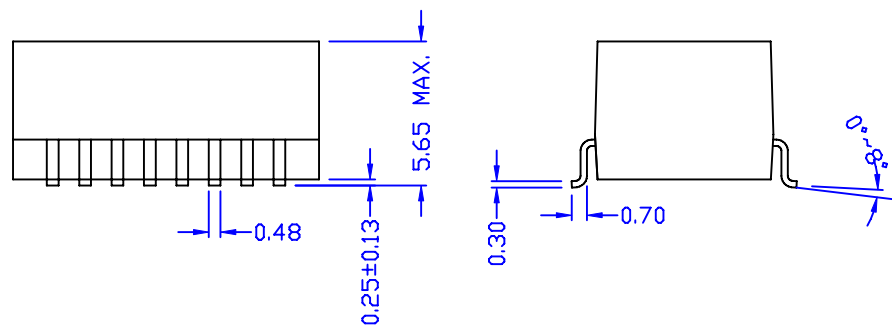
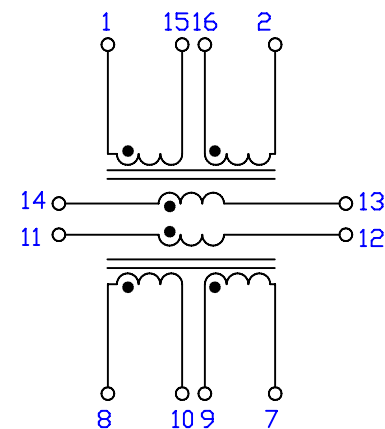
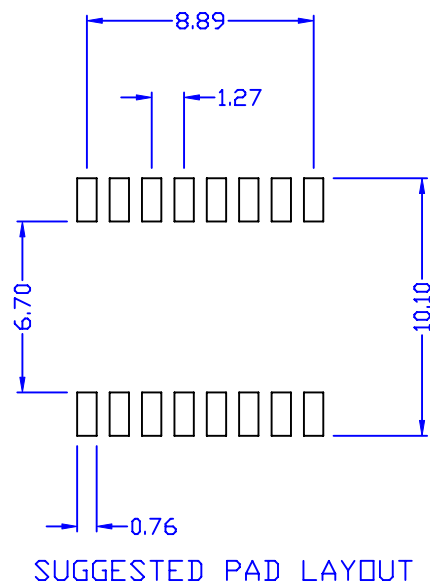


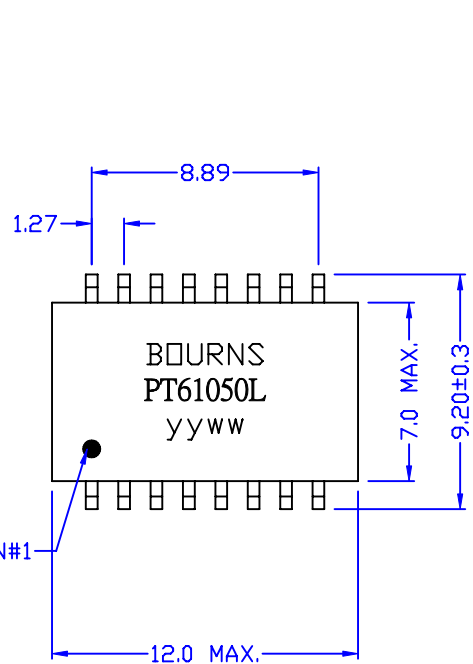

ELECTRICAL CHARACTERISTICS :

1. TURNS RATIO :
PIN 1-15 : 16-2 : 14-13 = 11:11:8 ±5%
PIN 8-10 : 9-7 : 11-12 = 11: 11 : 8 ±5%
2. D.C.R : 1-15 = 16-2 = 8-10 = 9-7 = 0.3 OHM MAX.
11-12 = 14-13 = 0.35 OHM MAX.
3. RETURN LOSS : 1MHZ = -30dB MIN. 10MHZ = -30dB MIN.
100MHZ = -25dB MIN. 250MHZ = -20dB MIN.
4. NEAR BALANCE : 1MHZ = -70dB MAX. 10MHZ = -65dB MAX.
100MHZ = -50dB MAX. 250MHZ = -35dB MAX.
5. RoHS COMPLIANT.

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ±0.25

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004	TITLE ISOLATION TRANSFORMER	
							DWG. NO. PT61050EL	
	RELEASE	01/15/2007	PAIR	WILLIE	EUGENE	UNITS: M/M	SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	SHEET 1 OF 1	
REVISIONS						01/15/07	DRAW <i>Pair</i>	